GOLDSTAR KF-14U40

MODEL

SERVICE MANUAL

KEY BOARD
P101B (20 INCH/21 INCH)
P101C (14 INCH)
SW03 STOP/EJECT
SW04 REC
SW05 REW
SW06 PLAY
SW07 FF
SW08 P/STILL
SW09 MENU
SW01 POWER
SW02 OK
SW11 PR(-)
SW12 PR(+)
SW13 VOL(-)
SW14 VOL(+)
RC01 RECEIVER
OUT GND Vcc
P04
MODE4 MODE3 MODE2 MODE1 GND
REC LED (red)
T.REC LED (red)
STBY LED (red)
CST IN LED (green)
S01 T-UP END
SW11 CST SW
OPTION
100 99 98 97 96 95 PIN
94 PIN
CIR NBR
OPTION
ACTIVE
D06 4HD 0
D07 HYPER 0
D08 ENG-ONLY 0
D09 SECAM PB 0
D10 MESE-OFF 0
D11 SCART 0
IC03 ST24C16
SDA SCK GND Vcc
IC01 KIA7033P
IC04
NC REC LED T.REC LED STBY LED AC SIN SCK CS OSC2 OSC1
Vss BLNK RED OSD MUTE GREEN CST IN LED BLUE HOR VERT Vdd
6VA
S04 T/UP REEL
Q01 KRC103M
S03 SUP REEL
Q03 KRC103M
DECK IR LED
LED05
HD6473977F IC10
PLL DATA
PLL ENA
PLL CLK
OSD DATA
OSD ENA
OSD CLK
J120 CTL TP
IC06 KIA7033P
IC02 GL358
CAP PWM
D PWM
SCART 16 PIN
J170 H/SW
J218 PB RF
P03
LD(+) LD(-) N.C. PB AUDIO REC AUDIO GND A/E CTL(-) CTL(+)
P05
MOTOR GND 14VA CFG 5.3V CAP F/R GND CAP CTL N.C.
P301B
PB-RF NTSC H LP H 5.3V GND PB H VIDEO ENV H/SW H/AMP SW TRICK H REC H GND
P302B
GND REG 5.3V MES DET H SECAM H C-SYNC VV/EE GND D-V SYNC VIDEO OUT GND CVBS IN MESCAM CONT H
P01
DPG GND MOTOR GND 12VA D.CTL DFG(+)
P02
GND FULL ERASE
IC05 GL7445
GND OUT(+) P1 Vref IN(-) IN(+) VCC1 VCC2 P2 OUT(-)
S02 SUP END
V-IN JK01 A-IN
REG PG
PG ADJ
REC BIAS
REC BAIS TP
IC401 BA7797
REC EQ AMP
LINE
PB
ALC
BUF
T401 LPF
NSTC H
P1801
GND 12VA(D) GND 14VA(C) GND 12VA(A/TU) 5.3V GND 6VA MON CTL PWR CTL 40VA
IC203 LA7222
P502B
FB IN(TXT) B IN(TXT) G IN(TXT) R IN(TXT) NTSC H + FORC PAL H VP HP FB IN(OSD) B IN(OSD) G IN(OSD) R IN(OSD) GND CVBS2(AV) GND CVBS OUT (TXT,Y/C)
56 PIN NTSC H
SCART
VIDEI IN
VIDEO OUT
JK201
COM RTN
VIDEO IN
VIDEO OUT
FB RTN
V.RTN
FB
RED
N.C.
RED RTN
N.C.
GREEN
N.C.
G RTN
FUC SW
BLUE
AUDIO IN
B RTN
A.GND
AUDIO OUT
AUDIO IN
AUDIO OUT
J225 AUDIO OUT
VV H
REC H
J229 (SCART)
J401 (AV)
TU-A
PL-A
EE VV
AV1 AV2
IC202 LA7222
J243 (SCART)
J247 (AV)
AV1 : SCART IN
AV2 : FRONT IN
PLL CS PLL DATA PLL CLK TU LOCK
VV/EE AV1/AV2 TU/AV
J421 VIDEO OUT
VIDEO OUT
P501B
CVBS3(Y/C) N.C. GND VIDEO OUT(2V) GND AUDIO OUT(0.5V) GND SDA SCL AUDIO IN(PLAY,A/V) A.MUTE H IF1 IF2 GND AGC
R419 (R(0) CHIP)
R118 (R(0) CHIP)
C80,C81,C83,C84
L204,P1808
READY
SCART 8PIN H
PIN 84
J292 AGC
TU201
CS DATA CLK LO 5V 33V IF 12V AGC BT
P1808
GND BUS STOP VCD SDA VCD SCL EEP SDA EEP SCL

MV-64A MAIN2 SCHEMATIC DIAGRAM

NOTICE
Since this is a basic schematic diagram.
The value of components and some partical connection aresubject to change for improvement.

The components marked ⚠ conform to VDE or IEC guidelines and are essential for safe operation of the set. while those marked ⚠ are required for correct operation. Use specified parts only when replacing.

VALUE OF RESISTER. CAPACITOR AND INDUCTOR

1. Resistances are shown in ohm. K = 1.000 M = 1.000.000 .
2. Unless otherwise noted in schematic. all capacitor values less than 1 are expressed in mfd and the values more than 1 in pF
3. Unless otherwise noted in schematic. all coil values more than 1 are expressed in uH. and the values less than 1 in H.

OBSERVATION OF VOLTAGES AND WAVEFORMS

1. Voltages read with VTVM from point shown to chassis ground. line voltages 220 Volts. colour bar signal
2. Voltages reading may very ±20%.
3. The schematic shown is representative only.
4. All waveforms are taken using a wide band oscilloscope and a low capacity probe.
5. Check FINE TUNING. AGC. BRIGHTNESS. CONTRAST and COLOUR controls for best picture. make sure that CONTRAST and COLOUR controls are in mid position and BRIGHTNESS controls is almost in maximum position.
6. Waveforms are takrn using a standard colour bar signal.

20/21 INCH CPT BOARD

14 INCH CPT BOARD

IC701 TDA8351

★TABLE OF INCH CONVERSION

NO	CIRCUIT NO	INCH 21"	INCH 20"	INCH 14"	REMARK
1	R731	1.8K	1.5K	2.7K	RESISTOR. RN 1/6W
2	R732	510K	390K	-	RESISTOR. RD 1/6W
3	R740	-	-	2.7K	RESISTOR. RN 1/6W
4	R741	-	-	820K	RESISTOR. RD 1/6W
5	R702	47K	47K	47K	RESISTOR. RS 0.5W
6	R703	100K	100K	130K	RESISTOR. RD 0.5W
7	FR901	1	0.68	-	RESISTOR. RF 2W
8	FR902	0.68	0.68	2.2	RESISTOR. RF 2W
9	C781	0.0091u	0.0091u	0.0086u	CAPACITOR. MPP 1.6K
10	C787	0.43u	0.39u	0.62u	CAPACITOR. MPP 200V
11	L782	-L01W	-L02C	-L01W	COIL. LINEARITY(150-)
12	D706	1S2471	1S2471	TIN WIRE	DIODE
13	T701	-6001C	-6001C	-6001E	FBT (6174Z-)
14	P901A	-A05C	-A05C	-A05B	CONNECTOR. 5P(387-)
15		6620VBC001A	6620VBC001A	381-100F	CPT SOCKET
16		-852C	-852C	-852B	CPT EARTH LEAD(170-)
17					CPT BOARD
18					

►TABLE OF POWER CONVERSION◄

NO	CIRCUIT NO	RANGE WIDE(100-270V)	RANGE NARROW(230V)	REMARK
1	F801	TIME LAG	H8C	FUSE
2	L802	150-F06G	150-F06H	LINE FILTER
3	L801	TIN WIRE	TIN WIRE	LINE FILTER
4	C806	200u/400V	-	CAPACITOR ELEC
5				
6				
7				
8				

1997/02/26

MV-64A VCD SCHEMATIC DIAGRAM

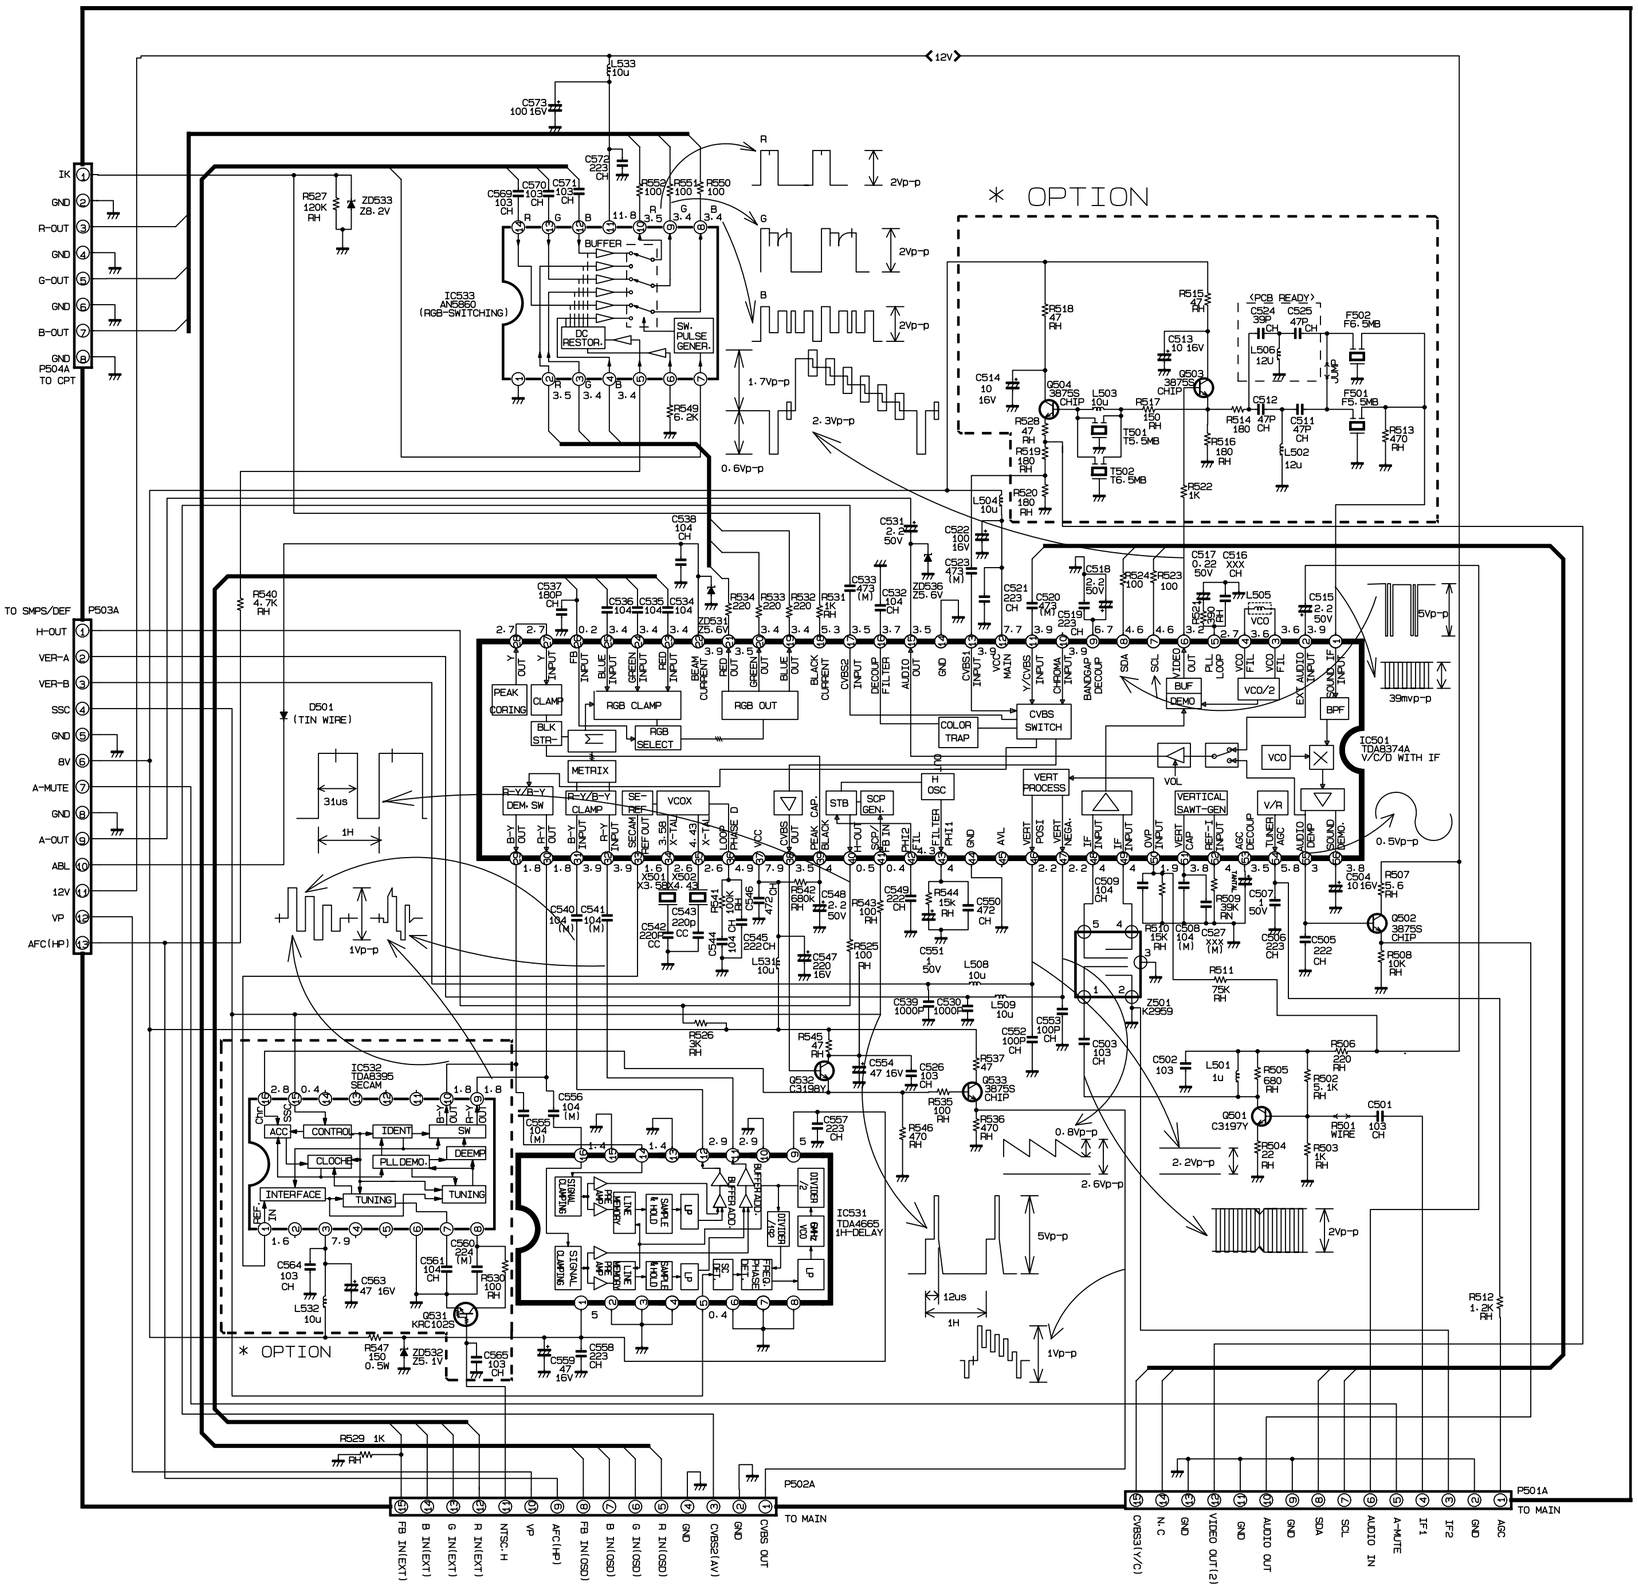

NOTICE

Since this is a basic schematic diagram.
The value of components and some partical connection aresubject to change for improvement.

The components marked ⚠ conform to VDE or IEC guidelines and are essential for safe operation of the set. while those marked ⚠ are required for correct operation. Use specified parts only when replacing.

VALUE OF RESISTER. CAPACITOR AND INDUCTOR

1. Resistances are shown in ohm. K = 1.000 M = 1.000.000 .
2. Unless otherwise noted in schematic. all capacitor values less than 1 are expresses in mfd and the values more than 1 in pF
3. Unless otherwise noted in schematic. all coil values more . than 1 are expressed in uH. and the values less than 1 in H.

OBSERVATION OF VOLTAGES AND WAVEFORMS

1. Voltages read with VTVM from point shown to chassis ground. line voltages 220 Volts. colour bar signal
2. Voltages reading may very ±20%.
3. The schematic shown is representative only.
4. All waveforms are taken using a wide band oscilloscope and a low capacity probe.
5. Check FINE TUNING. AGC. BRIGHTNESS. CONTRAST and COLOUR controls for best picture. make sure that CONTRAST and COLOUR controls are in mid position and BRIGHTNESS controls is almost in maximum position.
6. Waveforms are takrn using a standard colour bar signal.

★ TABLE OF SYSTEM CONVERSION(OPTION)

NO	CIRCUIT NO	SYSTEM			REMARK
		FULL	PAL-I/I		
1	IC532	O	-		IC. TDA8395
2	T501	T 5.5MB	T 6.0MB		FILTER. TRAP
3	T502	T 6.5MB	-		FILTER. TRAP
4	F501	F 5.5MC	F 6.0MC		FILTER. BPF
5	F502	F 6.5MC	—		FILTER. BPF
6	L502	12u			INDUCTOR
7	L503	10u			INDUCTOR
8	L532	10u	—		INDUCTOR
9	C560	224	—		CAPACITOR. MYLAR
10	C561	104	—		CAPACITOR. CHIP
11	C563	47u	—		CAPACITOR. ELEC 16V
12	C564	103	—		CAPACITOR. CHIP
13	C565	103	—		CAPACITOR. CHIP
14	R530	100	—		RESISTOR. CHIP
15	Q531	KRC102S	—		TRANSISTOR. CHIP
16					

Loc No	C/Part No	Description
IC852	0IKE780600B	IC,KEC
IC857	0IKE780600B	IC,KEC
IC856	0IKE781200C	IC,KEC
IC601	0ISG200600A	IC, SGS-THOMSON
Q857	0TR205800AB	TRANSISTOR
Q781	0TR249900AA	TRANSISTOR
A2	105-231Y	REMOTE CONTROLLER
120	120-101D	SPEAKER,GENERAL
A3	132-210G	ANTENNA
A3	132-210H	ANTENNA
150	150-D02W	COIL,DEGAUSSING
170	170-A01A	LEAD SET
P801	174-009N	CORD
112	2055-V0744E	CPT
503	303-F62A	COVER
300	3091V00064J	CABINET ASSY
315	315-740J	DOOR
320	320-062J	SPRING
913	332-057A	SCREW
400	3809V00076G	BACK COVER ASSY
511	381-100F	SOCKET
A1	3828VA0100S	MANUAL,OWNERS
_____	3828VD0035E	SVC MANUAL
601	4810V00011A	BRACKET
501	4810V00012A	BRACKET
340	5020V00135A	BUTTON
360	5020V00136A	BUTTON
310	5020V00137A	BUTTON
350	5020V00138A	BUTTON
_____	6631V25020H	CONNECTOR ASSY
_____	6631V25023L	CONNECTOR ASSY
_____	6631V25027G	CONNECTOR ASSY
520	6871VDM008S	PWB(PCB) ASSY
610	6871VMM011T	PWB(PCB) ASSY
620	6871VSM012C	PWB ASSY
630	6871VSM013B	PWB ASSY
650	6871VSM070B	PWB ASSY
640	6871VSM126A	PWB(PCB) ASSY
153	153-113V	DY
153	153-113V	DY
C01	181-442N	C,POLYESTER
C02	0CH1103K516	CHIP CAPA CERAMIC M/L H.D F/S
C03	0CH1103K516	CHIP CAPA CERAMIC M/L H.D F/S
C04	0CE106DF618	CAPACITOR,ELECTROLYTIC
C05	0CX4700K409	CAPACITOR TUBULA(T.C)
C06	0CN2710K519	CAPACITOR TUBULA(HIGH DIELE)
C07	0CE226DF618	CAPACITOR,ELECTROLYTIC
C08	0CE1074F618	C,ELECTROLYTIC
C09	0CH2223K516	CAPA,CHIP CERAMIC M/L H.D R/S
C10	0CE107DD618	CAPACITOR,ELECTROLYTIC
C11	0CH2223K516	CAPA,CHIP CERAMIC M/L H.D R/S
C12	0CH2223K516	CAPA,CHIP CERAMIC M/L H.D R/S
C13	0CE107DD618	CAPACITOR,ELECTROLYTIC
C14	0CE4753K618	CAPACITOR,ELECTROLYTIC

C15	0CH4151K406	CHIP CAPA CERAMIC M/L T.C F/S
C16	0CH4100K406	CHIP CAPA CERAMIC M/L T.C F/S
C17	0CH4120K406	CHIP CAPA CERAMIC M/L T.C F/S
C18	0CC1500K415	CAPACITOR,CERAMIC(TEMP COMP)
C19	0CC1500K415	CAPACITOR,CERAMIC(TEMP COMP)
C20	0CH5080K106	CAPACITOR,CHIP[CERAMIC M/L TC
C21	0CH5080K106	CAPACITOR,CHIP[CERAMIC M/L TC
C22	0CH1103K516	CHIP CAPA CERAMIC M/L H.D F/S
C23	181-442T	C,POLYESTER
C24	0CE477DF618	CAPACITOR,ELECTROLYTIC
C25	0CE1063F618	C,ELECTROLYTIC
C26	0CH1103K516	CHIP CAPA CERAMIC M/L H.D F/S
C27	0CH1104K946	CHIP CAPA CERAMIC M/L H.D F/S
C28	0CH1103K516	CHIP CAPA CERAMIC M/L H.D F/S
C29	0CN1030F679	CAPACITOR TUBULA(HIGH DIELE)
C30	181-002B	C,GOLD CAP.
C31	0CE107DD618	CAPACITOR,ELECTROLYTIC
C32	0CE1074F618	C,ELECTROLYTIC
C3A3	0CE1063F618	C,ELECTROLYTIC
C33	0CH2223K516	CAPA,CHIP CERAMIC M/L H.D R/S
C34	0CE1074F618	C,ELECTROLYTIC
C35	0CE1074F618	C,ELECTROLYTIC
C36	0CH2223K516	CAPA,CHIP CERAMIC M/L H.D R/S
C37	0CH1103K516	CHIP CAPA CERAMIC M/L H.D F/S
C38	0CH1103K516	CHIP CAPA CERAMIC M/L H.D F/S
C39	0CH2473K516	CAPA,CHIP CERAMIC M/L H.D R/S
C40	0CH1104K946	CHIP CAPA CERAMIC M/L H.D F/S
C41	0CH1104K946	CHIP CAPA CERAMIC M/L H.D F/S
C42	0CH1104K946	CHIP CAPA CERAMIC M/L H.D F/S
C43	0CE2253K616	CAPACITOR,ELECTROLYTIC
C44	0CE476DD618	CAPACITOR,ELECTROLYTIC
C45	0CE4763F618	CAPACITOR,ELECTROLYTIC
C46	0CH2223K516	CAPA,CHIP CERAMIC M/L H.D R/S
C47	0CE107DD618	CAPACITOR,ELECTROLYTIC
C48	0CN1030F679	CAPACITOR TUBULA(HIGH DIELE)
C49	0CQ2231N509	CAPACITOR POLYESTER(MYLAR)
C50	0CX4700K409	CAPACITOR TUBULA(T.C)
C51	0CN1020K519	CAPACITOR TUBULA(HIGH DIELE)
C52	0CH1104K946	CHIP CAPA CERAMIC M/L H.D F/S
C53	0CE104DK618	CAPACITOR,ELECTROLYTIC
C54	0CE227DF618	CAPACITOR,ELECTROLYTIC
C55	0CE225DK618	CAPACITOR,ELECTROLYTIC
C56	0CN1030F679	CAPACITOR TUBULA(HIGH DIELE)
C57	0CE107DF618	CAPACITOR,ELECTROLYTIC
C58	0CH2223K516	CAPA,CHIP CERAMIC M/L H.D R/S
C59	0CE1053K616	C,ELECTROLYTIC
C60	0CE2263F618	C,ELECTROLYTIC
C61	0CH1102K516	CHIP CAPA CERAMIC M/L H.D F/S
C62	0CH2472K516	CAPA,CHIP CERAMIC M/L H.D R/S
C63	0CQ4721N509	CAPACITOR POLYESTER(MYLAR)
C64	0CH1102K516	CHIP CAPA CERAMIC M/L H.D F/S
C65	0CH1103K516	CHIP CAPA CERAMIC M/L H.D F/S
C66	0CE1074F618	C,ELECTROLYTIC
C67	0CH1103K516	CHIP CAPA CERAMIC M/L H.D F/S
C69	0CH2223K516	CAPA,CHIP CERAMIC M/L H.D R/S
C70	0CN9100K519	CAPACITOR TUBULA(HIGH DIELE)

C71	0CN9100K519	CAPACITOR TUBULA(HIGH DIELE)
C72	0CE1053K618	C,ELECTROLYTIC
C73	0CH1103K516	CHIP CAPA CERAMIC M/L H.D F/S
C74	0CN2210K519	CAPACITOR TUBULA(HIGH DIELE)
C75	0CH5101K406	CAPA,CHIP CERAMIC M/L T.C R/S
C76	0CH5101K406	CAPA,CHIP CERAMIC M/L T.C R/S
C77	0CH5101K406	CAPA,CHIP CERAMIC M/L T.C R/S
C78	0CH5101K406	CAPA,CHIP CERAMIC M/L T.C R/S
C79	0CH1103K516	CHIP CAPA CERAMIC M/L H.D F/S
C85	0CE3363F618	C,ELECTROLYTIC
C86	0CE3363F618	C,ELECTROLYTIC
C201	0CN2230H949	CAPACITOR TUBULA(HIGH DIELE)
C202	0CE476DF618	CAPACITOR,ELECTROLYTIC
C203	0CH2223K516	CAPA,CHIP CERAMIC M/L H.D R/S
C204	0CN1010K519	CAPACITOR TUBULA(HIGH DIELE)
C205	0CN1010K519	CAPACITOR TUBULA(HIGH DIELE)
C206	0CE476DK618	CAPACITOR,ELECTROLYTIC
C207	0CN2230H949	CAPACITOR TUBULA(HIGH DIELE)
C209	0CH2223K516	CAPA,CHIP CERAMIC M/L H.D R/S
C210	0CE1086F618	CAPACITOR,ELECTROLYTIC
C212	0CH1103K516	CHIP CAPA CERAMIC M/L H.D F/S
C213	0CE476DD618	CAPACITOR,ELECTROLYTIC
C214	0CE226DF618	CAPACITOR,ELECTROLYTIC
C215	0CN1010K519	CAPACITOR TUBULA(HIGH DIELE)
C216	0CE226DF618	CAPACITOR,ELECTROLYTIC
C217	0CE107DF618	CAPACITOR,ELECTROLYTIC
C218	0CH2223K516	CAPA,CHIP CERAMIC M/L H.D R/S
C219	0CE226DF618	CAPACITOR,ELECTROLYTIC
C220	0CE226DF618	CAPACITOR,ELECTROLYTIC
C221	0CE226DF618	CAPACITOR,ELECTROLYTIC
C222	0CE226DF618	CAPACITOR,ELECTROLYTIC
C224	0CE107DF618	CAPACITOR,ELECTROLYTIC
C226	0CE226DF618	CAPACITOR,ELECTROLYTIC
C227	0CE1063F618	C,ELECTROLYTIC
C229	0CH2223K516	CAPA,CHIP CERAMIC M/L H.D R/S
C230	0CE107DF618	CAPACITOR,ELECTROLYTIC
C231	0CE475DK618	CAPACITOR,ELECTROLYTIC
C232	0CH1102K516	CHIP CAPA CERAMIC M/L H.D F/S
C233	0CE226DF618	CAPACITOR,ELECTROLYTIC
C234	0CE226DF618	CAPACITOR,ELECTROLYTIC
C238	0CE226DF618	CAPACITOR,ELECTROLYTIC
C239	0CE477DF618	CAPACITOR,ELECTROLYTIC
C240	0CH1102K516	CHIP CAPA CERAMIC M/L H.D F/S
C302	0CE107DD618	CAPACITOR,ELECTROLYTIC
C308	0CE1053K618	C,ELECTROLYTIC
C311	0CE1074F618	C,ELECTROLYTIC
C313	0CE1053K618	C,ELECTROLYTIC
C314	0CE1053K618	C,ELECTROLYTIC
C320	0CE105DK618	CAPACITOR,ELECTROLYTIC
C321	0CE106DF618	CAPACITOR,ELECTROLYTIC
C326	0CE107DD618	CAPACITOR,ELECTROLYTIC
C328	0CE1053K618	C,ELECTROLYTIC
C331	0CE1053K616	C,ELECTROLYTIC
C335	0CE1063F618	C,ELECTROLYTIC
C341	0CE1074F618	C,ELECTROLYTIC
C342	0CE1063F618	C,ELECTROLYTIC

C374	0CE105DK618	CAPACITOR,ELECTROLYTIC
C377	0CE1053K618	C,ELECTROLYTIC
C379	0CE1074F618	C,ELECTROLYTIC
C397	0CE1074F618	C,ELECTROLYTIC
C401	0CE1063F618	C,ELECTROLYTIC
C402	0CH1102K516	CHIP CAPA CERAMIC M/L H.D F/S
C403	0CE1063F618	C,ELECTROLYTIC
C404	0CN2210K519	CAPACITOR TUBULA(HIGH DIELE)
C405	0CQ3321N509	CAPACITOR POLYESTER(MYLAR)
C406	0CQ1821N509	CAPACITOR POLYESTER(MYLAR)
C407	0CE476DF618	CAPACITOR,ELECTROLYTIC
C408	0CE475DK618	CAPACITOR,ELECTROLYTIC
C409	0CE1043K618	C,ELECTROLYTIC
C410	0CH2472K516	CAPA,CHIP CERAMIC M/L H.D R/S
C411	0CE104DK618	CAPACITOR,ELECTROLYTIC
C412	0CE475DK618	CAPACITOR,ELECTROLYTIC
C413	0CE1043K618	C,ELECTROLYTIC
C414	181-442N	C,POLYESTER
C415	0CE226DF618	CAPACITOR,ELECTROLYTIC
C416	0CQ1031N509	CAPACITOR POLYESTER(MYLAR)
C417	0CH2223K516	CAPA,CHIP CERAMIC M/L H.D R/S
C420	0CE107DF618	CAPACITOR,ELECTROLYTIC
C421	0CH2223K516	CAPA,CHIP CERAMIC M/L H.D R/S
C422	0CH1103K516	CHIP CAPA CERAMIC M/L H.D F/S
C428	0CE107DF618	CAPACITOR,ELECTROLYTIC
C430	181-442N	C,POLYESTER
C431	181-442N	C,POLYESTER
C432	0CE106DF618	CAPACITOR,ELECTROLYTIC
C433	181-442X	C,POLYESTER
C502	0CN1030F679	CAPACITOR TUBULA(HIGH DIELE)
C504	0CE106DF618	CAPACITOR,ELECTROLYTIC
C507	0CSZVTA001C	C,TANTALUM
C508	0CQ1041N455	CAPACITOR,POLYESTER(MYLAR)
C510	0CC0800K165	CAPACITOR CERAMIC(TEMP COMP)
C513	0CE106DF618	CAPACITOR,ELECTROLYTIC
C514	0CE106DF618	CAPACITOR,ELECTROLYTIC
C515	0CE225DK618	CAPACITOR,ELECTROLYTIC
C517	0CE224DK618	CAPACITOR,ELECTROLYTIC
C518	0CE2253K618	C,ELECTROLYTIC
C520	0CQ4731N509	CAPACITOR POLYESTER(MYLAR)
C522	0CE107DD618	CAPACITOR,ELECTROLYTIC
C523	0CQ4731N509	CAPACITOR POLYESTER(MYLAR)
C530	0CN1020K519	CAPACITOR TUBULA(HIGH DIELE)
C531	0CE225DK618	CAPACITOR,ELECTROLYTIC
C533	0CQ4731N509	CAPACITOR POLYESTER(MYLAR)
C534	0CN1040K949	CAPACITOR TUBULA(HIGH DIELE)
C535	0CN1040K949	CAPACITOR TUBULA(HIGH DIELE)
C536	0CN1040K949	CAPACITOR TUBULA(HIGH DIELE)
C539	0CN1020K519	CAPACITOR TUBULA(HIGH DIELE)
C540	0CQ1042K439	CAPACITOR,POLYESTER(MYLAR)
C540	181-007C	C,MPE
C541	0CQ1042K439	CAPACITOR,POLYESTER(MYLAR)
C541	181-007C	C,MPE
C542	0CC2210K405	CAPACITOR CERAMIC(TEMP COMP)
C543	0CC2210K405	CAPACITOR CERAMIC(TEMP COMP)
C547	0CE227DD618	CAPACITOR,ELECTROLYTIC

C548	0CE225DK618	CAPACITOR,ELECTROLYTIC
C551	0CE105DK618	CAPACITOR,ELECTROLYTIC
C554	0CE476DD618	CAPACITOR,ELECTROLYTIC
C555	0CQ1042K439	CAPACITOR,POLYESTER(MYLAR)
C555	181-007C	C,MPE
C556	0CQ1042K439	CAPACITOR,POLYESTER(MYLAR)
C556	181-007C	C,MPE
C559	0CE476DD618	CAPACITOR,ELECTROLYTIC
C560	0CQ2242K439	CAPACITOR,POLYESTER(MYLAR)
C560	181-007F	C,MPE
C563	0CE476DD618	CAPACITOR,ELECTROLYTIC
C573	0CE107DF618	CAPACITOR,ELECTROLYTIC
C601	0CE475DK618	CAPACITOR,ELECTROLYTIC
C602	0CE226DK618	CAPACITOR,ELECTROLYTIC
C603	0CQ3931N509	CAPACITOR POLYESTER(MYLAR)
C604	0CE106DH618	CAPACITOR,ELECTROLYTIC
C605	0CQ1041N509	CAPACITOR POLYESTER(MYLAR)
C606	0CE227DJ618	CAPACITOR,ELECTROLYTIC
C607	0CE227DF618	CAPACITOR,ELECTROLYTIC
C608	0CN1010K519	CAPACITOR TUBULA(HIGH DIELE)
C609	0CE107DF618	CAPACITOR,ELECTROLYTIC
C610	0CE107DF618	CAPACITOR,ELECTROLYTIC
C701	181-009V	C,PP
C702	0CE2261R618	CAPACITOR,ELECTROLYTIC
C703	0CK4710W515	CAPACITOR CERAMIC(HIGH DIELE)
C704	0CE337DK618	CAPACITOR,ELECTROLYTIC
C705	0CK4710W515	CAPACITOR CERAMIC(HIGH DIELE)
C707	0CE475DK618	CAPACITOR,ELECTROLYTIC
C708	0CE226DN618	CAPACITOR,ELECTROLYTIC
C709	0CK4710W515	CAPACITOR CERAMIC(HIGH DIELE)
C731	0CN1010K519	CAPACITOR TUBULA(HIGH DIELE)
C732	0CQ1041N509	CAPACITOR POLYESTER(MYLAR)
C733	0CE337DK618	CAPACITOR,ELECTROLYTIC
C734	0CE226DN618	CAPACITOR,ELECTROLYTIC
C736	0CQ1031N509	CAPACITOR POLYESTER(MYLAR)
C737	0CQ4731N509	CAPACITOR POLYESTER(MYLAR)
C738	0CK3320W515	CAPACITOR CERAMIC(HIGH DIELE)
C739	0CK3320W515	CAPACITOR CERAMIC(HIGH DIELE)
C740	0CQ1031N509	CAPACITOR POLYESTER(MYLAR)
C781	181-015J	C,MPP
C782	0CE105DP618	CAPACITOR,ELECTROLYT
C783	0CK3310W515	CAPACITOR CERAMIC(HIGH DIELE)
C784	0CN3310K519	CAPACITOR TUBULA(HIGH DIELE)
C785	0CE225DP618	CAPACITOR,ELECTROLYTIC
C786	0CK8210W515	CAPACITOR CERAMIC(HIGH DIELE)
C787	181-013H	C,MPP
C801	0CQZVBK002C	CAPACITOR,POLYESTER
C802	0CQZVBK002C	CAPACITOR,POLYESTER
C803	0CK10201515	CAPACITOR,CERAMIC(HIGH DIELE)
C804	0CK10201515	CAPACITOR,CERAMIC(HIGH DIELE)
C805	0CK10201515	CAPACITOR,CERAMIC(HIGH DIELE)
C807	0CEZVBK002B	CAPACITOR,AL.ELECTROLYTIC
C808	0CK1020W515	CAPACITOR,CERAMIC(HIGH DIELE)
C809	0CE106DN618	CAPACITOR,ELECTROLYTIC
C810	0CE227DF618	CAPACITOR,ELECTROLYTIC
C811	181-120K	CAPACITOR

C813	181-120K	CAPACITOR
C814	0CE107DJ618	CAPACITOR,ELECTROLYTIC
C815	181-120F	C,ACT
C851	181-091C	C,DE0705
C852	0CK4710W515	CAPACITOR CERAMIC(HIGH DIELE)
C853	181-091C	C,DE0705
C854	0CK4710W515	CAPACITOR CERAMIC(HIGH DIELE)
C855	0CK4710W515	CAPACITOR CERAMIC(HIGH DIELE)
C856	0CE107DN618	CAPACITOR,ELECTROLYTIC
C857	0CE108DF618	CAPACITOR,ELECTROLYTIC
C858	0CE108DH618	CAPACITOR,ELECTROLYTIC
C859	0CE108DJ618	CAPACITOR,ELECTROLYTIC
C860	0CE227DP61A	CAPACITOR,ELECTROLYTIC
C861	0CQ4742K439	CAPACITOR,POLYESTER(MYLAR)
C861	181-007H	CAPACITOR
C863	0CE108DF618	CAPACITOR,ELECTROLYTIC
C864	0CE106DF618	CAPACITOR,ELECTROLYTIC
C865	0CE1071P650	CAPACITOR,ELECTROLYTIC
C866	0CE227DF618	CAPACITOR,ELECTROLYTIC
C867	0CE227DF618	CAPACITOR,ELECTROLYTIC
C868	0CE337DH618	CAPACITOR,ELECTROLYTIC
C869	0CE226DH618	CAPACITOR,ELECTROLYTIC
C870	0CQ1031N509	CAPACITOR POLYESTER(MYLAR)
C871	0CQ3342K439	CAPACITOR,POLYESTER(MYLAR)
C871	181-007G	CAPACITOR
C872	0CQ1031N509	CAPACITOR POLYESTER(MYLAR)
C873	0CE107DH618	CAPACITOR,ELECTROLYTIC
C874	0CE108DF618	CAPACITOR,ELECTROLYTIC
C875	0CE228DF618	CAPACITOR,ELECTROLYTIC
C876	0CE4741K636	CAPACITOR,ELECTROLYTIC
C1902	181-013L	C,MPP
C1903	181-013L	C,MPP
C1904	181-013L	C,MPP
C1911	0CE1061R618	CAPACITOR,ELECTROLYTIC
C1912	181-033T	CAPACITOR
C1913	0CX1200K409	CAPACITOR TUBULA(T.C)
C1914	0CX1200K409	CAPACITOR TUBULA(T.C)
C1915	0CX1200K409	CAPACITOR TUBULA(T.C)
C1916	0CK5610W515	CAPACITOR CERAMIC(HIGH DIELE)
C1917	0CK5610W515	CAPACITOR CERAMIC(HIGH DIELE)
C1918	0CK5610W515	CAPACITOR CERAMIC(HIGH DIELE)
C1919	0CE475DR618	CAPACITOR,ELECTROLYTIC
D01	0DD414809ED	DIODE
D02	0DD414809ED	DIODE
D03	0DD400309AD	DIODE
D04	0DD414809ED	DIODE
D05	0DD414809ED	DIODE
D07	0DD414809ED	DIODE
D14	0DD414809ED	DIODE
D15	0DD414809ED	DIODE
D16	0DD414809ED	DIODE
D201	0DD414809ED	DIODE
D202	0DD414809ED	DIODE
D203	0DD414809ED	DIODE
D204	0DD414809ED	DIODE
D301	0DD414809ED	DIODE

D303	0DD414809ED	DIODE
D305	0DD414809ED	DIODE
D308	0DD414809ED	DIODE
D315	0DD414809ED	DIODE
D316	0DD414809ED	DIODE
D320	0DD414809ED	DIODE
D401	0DD414809ED	DIODE
D402	0DD414809ED	DIODE
D601	0DD414809ED	DIODE
D701	0DD060009AC	DIODE
D702	0DD150009CA	DIODE
D703	0DD060009AC	DIODE
D705	0DD414809ED	DIODE
D707	0DD400309AD	DIODE
D781	0DD150009CA	DIODE
D801	0DD260000BB	DIODE
D805	0DD150009CE	DIODE
D806	0DD060009AC	DIODE
D807	0DD060009AC	DIODE
D808	0DD060009AC	DIODE
D809	0DD100009AL	DIODE
D851	0DD410000AD	DIODE
D852	0DD100009AE	DIODE
D853	0DD420000BB	DIODE
D854	0DD420000BB	DIODE
D855	0DD150009CA	DIODE
D856	0DD060009AC	DIODE
D857	0DD414809ED	DIODE
D858	0DD247109AA	DIODE
D860	0DD060009AC	DIODE
D861	0DD414809ED	DIODE
D862	0DD400309AD	DIODE
D1901	0DD400309AD	DIODE
F501	166-B02C	FILTER
F502	166-B02E	FILTER
F801	131-098B	FUSE
F851	131-096E	FUSE
F852	131-096E	FUSE
FB801	125-022K	CORE
FB802	125-123A	CORE
FB804	125-123A	CORE
FB851	125-123A	CORE
FR701	0RF0561H609	RESISTOR FUSIBLE
FR702	0RF0470J607	RESISTOR,FUSIBLE
FR704	0RF0101H609	RESISTOR FUSIBLE
FR851	0RF0101H609	RESISTOR FUSIBLE
FR854	0RF0101J607	RESISTOR,FUSIBLE
FR1901	180-D02M	R,RNF RND(S) CR
IC01	0ISS753300A	IC,SAMSUNG ELECTRONICS
IC02	0IKE358000A	IC,KEC
IC03	0ISG241600A	IC,SGS-THOMSON
IC04	0IMI350410J	IC,MITSUBISHI
IC05	0ISA164500B	IC,SANYO
IC06	0ISS753300A	IC,SAMSUNG ELECTRONICS
IC10	0IGS877801E	IC,LG SEMICONDUCTOR
IC202	0ISA722200A	IC, SANYO

IC203	0ISA722200A	IC, SANYO
IC301	0ISA743700A	IC,SANYO
IC302	0ISA899700A	IC,SANYO
IC303	0ISA741100A	IC,SANYO
IC304	0ISA735700A	IC,SANYO
IC401	0IRH779700A	IC,ROHM
IC501	0IPH837456A	IC,PHILIPS
IC524	0IKE780800A	IC,KEC
IC531	0IPH466550A	IC,PHILIPS
IC532	0IPH839520A	IC,PHILIPS
IC533	0IMA586000A	IC,MATSUSHITA
IC701	0IPH835150A	IC,PHILIPS
IC801	0ISK670700B	IC,SANKEN
IC802	0ISH123200B	IC,SHARP
IC803	0ISH123200B	IC,SHARP
IC851	0ISK115000A	IC,SANKEN
IC1901	0IPH610600A	IC,PHILIPS
IC1902	0IPH610600A	IC,PHILIPS
IC1903	0IPH610600A	IC,PHILIPS
J10	0RD2200F609	RESISTOR,FIXED CARBON FILM
J11	0RD2200F609	RESISTOR,FIXED CARBON FILM
J115	0RD2200F609	RESISTOR,FIXED CARBON FILM
J131	0RD2200F609	RESISTOR,FIXED CARBON FILM
J173	0RD2200F609	RESISTOR,FIXED CARBON FILM
J202	0RD2200F609	RESISTOR,FIXED CARBON FILM
J206	0RD2200F609	RESISTOR,FIXED CARBON FILM
JK01	380-401D	JACK ASSY
JK02	4930V00039A	HOLDER
JK201	380-397A	JACK
L01	0LA1000K139	INDUCTOR AXIAL LEAD
L02	0LA1000K139	INDUCTOR AXIAL LEAD
L03	0LA1000K139	INDUCTOR AXIAL LEAD
L04	0LA1000K139	INDUCTOR AXIAL LEAD
L05	0LA1000K139	INDUCTOR AXIAL LEAD
L06	0LA1000K139	INDUCTOR AXIAL LEAD
L07	0LA1000K139	INDUCTOR AXIAL LEAD
L08	0LA1000K139	INDUCTOR AXIAL LEAD
L09	0LA0681K119	INDUCTOR AXIAL LEAD
L201	0LA1000K139	INDUCTOR AXIAL LEAD
L203	0LA1000K139	INDUCTOR AXIAL LEAD
L205	0LA1000K139	INDUCTOR AXIAL LEAD
L206	0LA1000K139	INDUCTOR AXIAL LEAD
L207	0LA0152K119	INDUCTOR AXIAL LEAD
L208	0LA0472K119	INDUCTOR AXIAL LEAD
L210	0LA1000K139	INDUCTOR AXIAL LEAD
L211	0LA0152K119	INDUCTOR AXIAL LEAD
L213	0LA1000K119	INDUCTOR AXIAL LEAD
L215	0LA1000K119	INDUCTOR AXIAL LEAD
L216	0LA0102K119	INDUCTOR AXIAL LEAD
L301	0LA0222K119	INDUCTOR AXIAL LEAD
L302	0LA0222K119	INDUCTOR AXIAL LEAD
L303	0LA0272K119	INDUCTOR AXIAL LEAD
L304	0LA0222K119	INDUCTOR AXIAL LEAD
L308	0LA1200K119	INDUCTOR AXIAL LEAD
L309	0LA0222K119	INDUCTOR AXIAL LEAD
L310	0LA0561K119	INDUCTOR AXIAL LEAD

L311	0LA0821K119	INDUCTOR AXIAL LEAD
L315	0LA0682K119	INDUCTOR AXIAL LEAD
L350	0LA0821K119	INDUCTOR AXIAL LEAD
L353	0LA0152K119	INDUCTOR AXIAL LEAD
L354	0LA1000K119	INDUCTOR AXIAL LEAD
L355	0LA0152K119	INDUCTOR AXIAL LEAD
L356	0LA0152K119	INDUCTOR AXIAL LEAD
L357	0LA1800K119	INDUCTOR AXIAL LEAD
L358	0LA0222K119	INDUCTOR AXIAL LEAD
L359	0LA0222K119	INDUCTOR AXIAL LEAD
L360	0LA0222K119	INDUCTOR AXIAL LEAD
L361	0LA0222K119	INDUCTOR AXIAL LEAD
L371	0LA0822K119	INDUCTOR AXIAL LEAD
L372	0LA2200K119	INDUCTOR AXIAL LEAD
L401	0LA1000K139	INDUCTOR AXIAL LEAD
L402	0LA1000K139	INDUCTOR AXIAL LEAD
L403	0LA0102K119	INDUCTOR AXIAL LEAD
L501	0LA0101K119	INDUCTOR AXIAL LEAD
L502	0LA0122K119	INDUCTOR AXIAL LEAD
L503	0LA0102K119	INDUCTOR AXIAL LEAD
L504	0LA0102K119	INDUCTOR AXIAL LEAD
L505	150-E11H	COIL
L507	0LA0102K119	INDUCTOR AXIAL LEAD
L508	0LA0102K119	INDUCTOR AXIAL LEAD
L531	0LA0102K119	INDUCTOR AXIAL LEAD
L532	0LA0102K119	INDUCTOR AXIAL LEAD
L533	0LA0102K119	INDUCTOR AXIAL LEAD
L731	125-022K	CORE
L732	0RS0222H609	RESISTOR,FIX METAL FILM OXIDE
L733	0LA0102K139	INDUCTOR AXIAL LEAD
L734	0LA0102K139	INDUCTOR AXIAL LEAD
L782	150-L01W	COIL
L801	150-F06B	COIL
L802	150-F06B	COIL
L851	150-C02E	COIL
L1901	0LA0102K139	INDUCTOR AXIAL LEAD
LED01	162-002A	DIODE
LED05	0DL380009AB	LED(LIGHT EMITTED DI
LED05	0DL380009AB	LED(LIGHT EMITTED DI
P1A	387-A02Q	CONNECTOR ASSY
P301	387-916H	CONNECTOR ASSY
P851	387-552S	CONNECTOR ASSY
P901A	387-A05B	CONNECTOR ASSY
P1801	6631V25017G	CONNECTOR ASSY
Q01	0TR103009AD	TRANSISTOR
Q02	0TR103009AD	TRANSISTOR
Q03	0TR103009AD	TRANSISTOR
Q04	0TR733009AA	TRANSISTOR
Q05	0TR945009AA	TRANSISTOR
Q06	0TR945009AA	TRANSISTOR
Q07	0TR945009AA	TRANSISTOR
Q08	0TR945009AA	TRANSISTOR
Q202	0TR733009AA	TRANSISTOR
Q203	0TR945009AA	TRANSISTOR
Q204	0TR945009AA	TRANSISTOR
Q205	0TR945009AA	TRANSISTOR

Q303	0TR945009AA	TRANSISTOR
Q307	0TR945009AA	TRANSISTOR
Q308	0TR945009AA	TRANSISTOR
Q310	0TR733009AA	TRANSISTOR
Q311	0TR945009AA	TRANSISTOR
Q312	0TR945009AA	TRANSISTOR
Q315	0TR733009AA	TRANSISTOR
Q320	0TR733009AA	TRANSISTOR
Q321	0TR103009AD	TRANSISTOR
Q322	0TR103009AD	TRANSISTOR
Q323	0TR733009AA	TRANSISTOR
Q333	0TR150400BA	TRANSISTOR
Q403	0TR103009AD	TRANSISTOR
Q407	0TR733009AA	TRANSISTOR
Q408	0TR103009AD	TRANSISTOR
Q430	0TR320509AB	TRANSISTOR
Q501	0TR319709AB	TRANSISTOR
Q502	0TR387500AA	TRANSISTOR
Q503	0TR387500AA	TRANSISTOR
Q504	0TR387500AA	TRANSISTOR
Q531	0TR102009AG	TRANSISTOR
Q532	0TR945009AA	TRANSISTOR
Q533	0TR387500AA	TRANSISTOR
Q601	0TR945009AA	TRANSISTOR
Q602	0TR945009AA	TRANSISTOR
Q782	0TR320709AA	TRANSISTOR
Q801	0TR385200AA	TRANSISTOR
Q851	0TR322809AA	TRANSISTOR
Q852	0TR945009AA	TRANSISTOR
Q853	0TR945009AA	TRANSISTOR
Q854	0TR945009AA	TRANSISTOR
Q855	0TR945009AA	TRANSISTOR
Q856	0TR127309AA	TRANSISTOR
Q860	0TR945009AA	TRANSISTOR
Q861	0TR322809AA	TRANSISTOR
Q862	0TR968000AA	TRANSISTOR
Q863	0TR945009AA	TRANSISTOR
Q864	0TR322709AA	TRANSISTOR
R01	0RH1002D622	RESISTOR CHIP
R02	0RD5600F609	RESISTOR,FIXED CARBON FILM
R03	0RD5600F609	RESISTOR,FIXED CARBON FILM
R04	0RD2200F609	RESISTOR,FIXED CARBON FILM
R05	0RD2200F609	RESISTOR,FIXED CARBON FILM
R06	0RH3302D622	RESISTOR CHIP
R07	0RH1002D622	RESISTOR CHIP
R08	0RD2200F609	RESISTOR,FIXED CARBON FILM
R09	0RD2200F609	RESISTOR,FIXED CARBON FILM
R10	0RH3302D622	RESISTOR CHIP
R11	0RH1002D622	RESISTOR CHIP
R12	0RH4701D622	RESISTOR CHIP
R13	0RH4701D622	RESISTOR CHIP
R14	0RD3300F609	RESISTOR,FIXED CARBON FILM
R15	0RH3300D622	RESISTOR CHIP
R16	0RH2702D622	RESISTOR CHIP
R17	0RH1001D622	RESISTOR CHIP
R18	0RH2703D622	RESISTOR CHIP

R19	0RD1004F609	RESISTOR,FIXED CARBON FILM
R20	0RD1001F609	RESISTOR,FIXED CARBON FILM
R21	0RH1002D622	RESISTOR CHIP
R22	0RH1004D622	RESISTOR CHIP
R23	0RH1004D622	RESISTOR CHIP
R24	0RH1202D622	RESISTOR CHIP
R25	0RH1002D622	RESISTOR CHIP
R26	0RH1203D622	RESISTOR CHIP
R27	0RD1001F609	RESISTOR,FIXED CARBON FILM
R28	0RH4701D622	RESISTOR CHIP
R29	0RH4701D622	RESISTOR CHIP
R30	0RH4701D622	RESISTOR CHIP
R31	0RH4701D622	RESISTOR CHIP
R32	0RH4701D622	RESISTOR CHIP
R33	0RH4701D622	RESISTOR CHIP
R34	0RH4701D622	RESISTOR CHIP
R35	0RH4701D622	RESISTOR CHIP
R36	0RD2200F609	RESISTOR,FIXED CARBON FILM
R37	0RH4701D622	RESISTOR CHIP
R38	0RD2200F609	RESISTOR,FIXED CARBON FILM
R39	0RH1203D622	RESISTOR CHIP
R40	0RH1202D622	RESISTOR CHIP
R41	0RD1001F609	RESISTOR,FIXED CARBON FILM
R42	0RD1001F609	RESISTOR,FIXED CARBON FILM
R43	0RD2200F609	RESISTOR,FIXED CARBON FILM
R44	0RD2200F609	RESISTOR,FIXED CARBON FILM
R45	0RD2200F609	RESISTOR,FIXED CARBON FILM
R46	0RH2201D622	RESISTOR CHIP
R47	0RH2201D622	RESISTOR CHIP
R48	0RH2201D622	RESISTOR CHIP
R49	0RD2201F609	RESISTOR,FIXED CARBON FILM
R50	0RD3901F609	RESISTOR,FIXED CARBON FILM
R51	0RD4701F609	RESISTOR,FIXED CARBON FILM
R52	0RH4701D622	RESISTOR CHIP
R53	0RD3901F609	RESISTOR,FIXED CARBON FILM
R54	0RD4701F609	RESISTOR,FIXED CARBON FILM
R55	0RD1002F609	RESISTOR,FIXED CARBON FILM
R56	0RD4701F609	RESISTOR,FIXED CARBON FILM
R57	0RD4701F609	RESISTOR,FIXED CARBON FILM
R58	0RD4701F609	RESISTOR,FIXED CARBON FILM
R59	0RD4701F609	RESISTOR,FIXED CARBON FILM
R60	0RH1003D622	RESISTOR CHIP
R61	0RD1001F609	RESISTOR,FIXED CARBON FILM
R62	0RD2200F609	RESISTOR,FIXED CARBON FILM
R63	0RD2200F609	RESISTOR,FIXED CARBON FILM
R64	0RD1002F609	RESISTOR,FIXED CARBON FILM
R65	0RD1203F609	RESISTOR,FIXED CARBON FILM
R66	0RH2201D622	RESISTOR CHIP
R67	0RH5601D622	RESISTOR CHIP
R68	0RH4701D622	RESISTOR CHIP
R69	0RH3300D622	RESISTOR CHIP
R70	0RD5601F609	RESISTOR,FIXED CARBON FILM
R71	0RN1502F409	RESISTOR,FIX METAL F
R72	0RN1502F409	RESISTOR,FIX METAL F
R73	0RH4701D622	RESISTOR CHIP
R74	0RD5601F609	RESISTOR,FIXED CARBON FILM

R75	0RH2202D622	RESISTOR CHIP
R76	0RD4703F609	RESISTOR,FIXED CARBON FILM
R77	0RD1002F609	RESISTOR,FIXED CARBON FILM
R78	0RD1002F609	RESISTOR,FIXED CARBON FILM
R79	0RS0161H609	RESISTOR,FIX METAL FILM OXIDE
R80	0RS0161H609	RESISTOR,FIX METAL FILM OXIDE
R81	0RH1000D622	RESISTOR CHIP
R82	0RH2203D622	RESISTOR CHIP
R83	0RH1202D622	RESISTOR CHIP
R84	0RH1001D622	RESISTOR CHIP
R85	0RH1002D622	RESISTOR CHIP
R86	0RH3301D622	RESISTOR CHIP
R87	0RD2200F609	RESISTOR,FIXED CARBON FILM
R88	0RD2200F609	RESISTOR,FIXED CARBON FILM
R89	0RD1000F609	RESISTOR,FIXED CARBON FILM
R90	0RD1000F609	RESISTOR,FIXED CARBON FILM
R91	0RH1501D622	RESISTOR CHIP
R92	0RD1803F609	RESISTOR,FIXED CARBON FILM
R93	0RH3300D622	RESISTOR CHIP
R94	0RH3300D622	RESISTOR CHIP
R95	0RH3300D622	RESISTOR CHIP
R96	0RH3300D622	RESISTOR CHIP
R97	0RH4701D622	RESISTOR CHIP
R98	0RH0752D622	RESISTOR CHIP
R99	0RD1001F609	RESISTOR,FIXED CARBON FILM
R100	0RH6800D622	RESISTOR CHIP
R101	0RH8200D622	RESISTOR CHIP
R102	0RH1201D622	RESISTOR CHIP
R103	0RH1801D622	RESISTOR CHIP
R104	0RH3301D622	RESISTOR CHIP
R105	0RH6801D622	RESISTOR CHIP
R106	0RH6800D622	RESISTOR CHIP
R107	0RD1001F609	RESISTOR,FIXED CARBON FILM
R108	0RD1001F609	RESISTOR,FIXED CARBON FILM
R110	0RH1000D622	RESISTOR CHIP
R111	0RD5602F609	RESISTOR,FIXED CARBON FILM
R112	0RD1000F609	RESISTOR,FIXED CARBON FILM
R113	0RH1000D622	RESISTOR CHIP
R115	0RD1000F609	RESISTOR,FIXED CARBON FILM
R116	0RD1502F609	RESISTOR,FIXED CARBON FILM
R117	0RH4701D622	RESISTOR CHIP
R118	0RH0000D622	RESISTOR CHIP
R119	0RD1000F609	RESISTOR,FIXED CARBON FILM
R120	0RH4701D622	RESISTOR CHIP
R121	0RH1000D622	RESISTOR CHIP
R122	0RH1000D622	RESISTOR CHIP
R123	0RH0000D622	RESISTOR CHIP
R124	0RH2200D622	RESISTOR CHIP
R126	0RH0000D622	RESISTOR CHIP
R127	0RH0000D622	RESISTOR CHIP
R128	0RH0000D622	RESISTOR CHIP
R129	0RH0000D622	RESISTOR CHIP
R130	0RH2200D622	RESISTOR CHIP
R131	0RH0000D622	RESISTOR CHIP
R132	0RH0000D622	RESISTOR CHIP
R133	0RH0000D622	RESISTOR CHIP

R134	0RH0000D622	RESISTOR CHIP
R135	0RH0000D622	RESISTOR CHIP
R136	0RH0000D622	RESISTOR CHIP
R137	0RH0000D622	RESISTOR CHIP
R138	0RH0000D622	RESISTOR CHIP
R140	0RH0000D622	RESISTOR CHIP
R201	0RH2200D622	RESISTOR CHIP
R202	0RH2200D622	RESISTOR CHIP
R203	0RH2200D622	RESISTOR CHIP
R204	0RD2200F609	RESISTOR,FIXED CARBON FILM
R205	0RH3900D622	RESISTOR CHIP
R206	0RD1502F609	RESISTOR,FIXED CARBON FILM
R207	0RD1202F609	RESISTOR,FIXED CARBON FILM
R208	0RD2002F609	RESISTOR,FIXED CARBON FILM
R209	0RD3302F609	RESISTOR,FIXED CARBON FILM
R210	0RH6800D622	RESISTOR CHIP
R211	0RH0682D622	RESISTOR CHIP
R212	0RD1000F609	RESISTOR,FIXED CARBON FILM
R214	0RD1002F609	RESISTOR,FIXED CARBON FILM
R215	0RD1800F609	RESISTOR,FIXED CARBON FILM
R216	0RH0752D622	RESISTOR CHIP
R218	0RH0752D622	RESISTOR CHIP
R219	0RH1000D622	RESISTOR CHIP
R220	0RH1001D622	RESISTOR CHIP
R222	0RH4702D622	RESISTOR CHIP
R223	0RH4702D622	RESISTOR CHIP
R224	0RH1001D622	RESISTOR CHIP
R225	0RH4700D622	RESISTOR CHIP
R228	0RD1000F609	RESISTOR,FIXED CARBON FILM
R237	0RD3900F609	RESISTOR,FIXED CARBON FILM
R239	0RD1001F609	RESISTOR,FIXED CARBON FILM
R240	0RD1001F609	RESISTOR,FIXED CARBON FILM
R241	0RD1001F609	RESISTOR,FIXED CARBON FILM
R250	0RD6802F609	RESISTOR,FIXED CARBON FILM
R401	0RD0102F609	RESISTOR,FIXED CARBON FILM
R402	0RH1802D622	RESISTOR CHIP
R403	0RH2202D622	RESISTOR CHIP
R404	0RH1802D622	RESISTOR CHIP
R405	0RH1201D622	RESISTOR CHIP
R408	0RH0000D622	RESISTOR CHIP
R409	0RD1001F609	RESISTOR,FIXED CARBON FILM
R410	0RH1001D622	RESISTOR CHIP
R411	0RH1001D622	RESISTOR CHIP
R412	0RH6801D622	RESISTOR CHIP
R413	0RH4702D622	RESISTOR CHIP
R414	0RH1002D622	RESISTOR CHIP
R415	0RD8201F609	RESISTOR,FIXED CARBON FILM
R416	0RH3302D622	RESISTOR CHIP
R417	0RD1001F609	RESISTOR,FIXED CARBON FILM
R420	0RH3301D622	RESISTOR CHIP
R421	0RH0000D622	RESISTOR CHIP
R422	0RH2200D622	RESISTOR CHIP
R423	0RH3303D622	RESISTOR CHIP
R424	0RH1202D622	RESISTOR CHIP
R425	0RH1202D622	RESISTOR CHIP
R428	0RH4701D622	RESISTOR CHIP

R429	0RH1002D622	RESISTOR CHIP
R431	0RD2702F609	RESISTOR,FIXED CARBON FILM
R432	0RD0102F609	RESISTOR,FIXED CARBON FILM
R434	0RD0472F609	RESISTOR,FIXED CARBON FILM
R435	0RD4701F609	RESISTOR,FIXED CARBON FILM
R436	0RH6201D622	RESISTOR CHIP
R437	0RH1004D622	RESISTOR CHIP
R439	0RD4702F609	RESISTOR,FIXED CARBON FILM
R440	0RH0222D622	RESISTOR CHIP
R441	0RH0222D622	RESISTOR CHIP
R451	0RD8200F609	RESISTOR,FIXED CARBON FILM
R452	0RD1201F609	RESISTOR,FIXED CARBON FILM
R453	0RD1801F609	RESISTOR,FIXED CARBON FILM
R454	0RD3301F609	RESISTOR,FIXED CARBON FILM
R509	0RN3902F409	RESISTOR,FIX METAL FILM
R514	0RD1800F609	RESISTOR,FIXED CARBON FILM
R522	0RD1001F609	RESISTOR,FIXED CARBON FILM
R523	0RD1000F609	RESISTOR,FIXED CARBON FILM
R524	0RD1000F609	RESISTOR,FIXED CARBON FILM
R532	0RD2200F609	RESISTOR,FIXED CARBON FILM
R533	0RD2200F609	RESISTOR,FIXED CARBON FILM
R534	0RD2200F609	RESISTOR,FIXED CARBON FILM
R537	0RD0472F609	RESISTOR,FIXED CARBON FILM
R547	0RD1500H609	RESISTOR,FIXED CARBON FILM
R549	0RD6201F609	RESISTOR,FIXED CARBON FILM
R550	0RD1000F609	RESISTOR,FIXED CARBON FILM
R551	0RD1000F609	RESISTOR,FIXED CARBON FILM
R552	0RD1000F609	RESISTOR,FIXED CARBON FILM
R601	0RD1003F609	RESISTOR,FIXED CARBON FILM
R602	0RD1003F609	RESISTOR,FIXED CARBON FILM
R603	0RD1003F609	RESISTOR,FIXED CARBON FILM
R604	0RS0221H609	RESISTOR,FIX METAL FILM OXIDE
R605	0RD7502F609	RESISTOR,FIXED CARBON FILM
R606	0RD8201F609	RESISTOR,FIXED CARBON FILM
R607	0RD3902F609	RESISTOR,FIXED CARBON FILM
R608	0RD5102F609	RESISTOR,FIXED CARBON FILM
R609	0RD1001F609	RESISTOR,FIXED CARBON FILM
R610	0RD1201F609	RESISTOR,FIXED CARBON FILM
R611	0RD4701F609	RESISTOR,FIXED CARBON FILM
R612	0RD4701F609	RESISTOR,FIXED CARBON FILM
R701	0RD2203F609	RESISTOR,FIXED CARBON FILM
R702	0RS4702H609	RESISTOR,FIX METAL FILM OXIDE
R703	0RD1003H609	RESISTOR,FIXED CARBON FILM
R704	0RD2203H609	RESISTOR,FIXED CARBON FILM
R705	0RD1502H609	RESISTOR,FIXED CARBON FILM
R706	0RD2701H609	RESISTOR,FIXED CARBON FILM
R731	0RN2701F409	RESISTOR,FIX METAL FILM
R733	0RN0680J607	RESISTOR,FIX METAL FILM
R734	0RD0202F609	RESISTOR,FIXED CARBON FILM
R735	0RD3901F609	RESISTOR,FIXED CARBON FILM
R737	0RS2702J607	RESISTOR,FIX METAL FILM OXIDE
R739	0RS2200J607	RESISTOR,FIX METAL FILM OXIDE
R740	0RN2701F409	RESISTOR,FIX METAL FILM
R741	0RD8203F609	RESISTOR,FIXED CARBON FILM
R781	0RD0332H609	RESISTOR,FIXED CARBON FILM
R782	0RD3301H609	RESISTOR,FIXED CARBON FILM

R783	0RS4701K607	RESISTOR,FIX METAL FILM OXIDE
R784	0RD4700F609	RESISTOR,FIXED CARBON FILM
R785	0RS1202J607	RESISTOR,FIX METAL FILM OXIDE
R786	0RD1801H609	RESISTOR,FIXED CARBON FILM
R787	0RS4701K607	RESISTOR,FIX METAL FILM OXIDE
R788	0RD0912F609	RESISTOR,FIXED CARBON FILM
R802	180-822P	R,RWR
R805	0RS2202K607	RESISTOR,FIX METAL F
R806	0RS2202K607	RESISTOR,FIX METAL F
R807	0RS2002H609	RESISTOR,FIX METAL FILM OXIDE
R808	0RD1601F609	RESISTOR,FIXED CARBON FILM
R809	0RD1001F609	RESISTOR,FIXED CARBON FILM
R810	0RS0222K607	RESISTOR,FIX METAL FILM OXIDE
R811	180-A01H	R,RW ROUND G
R812	0RD1001F609	RESISTOR,FIXED CARBON FILM
R813	180-C02H	R,CARBON COMPOSIT
R815	0RD0151H609	RESISTOR,FIXED CARBON FILM
R821	0RD6801H609	RESISTOR,FIXED CARBON FILM
R822	0RD1000H609	RESISTOR,FIXED CARBON FILM
R851	0RD6801F609	RESISTOR,FIXED CARBON FILM
R852	0RD3301F609	RESISTOR,FIXED CARBON FILM
R853	0RD6201F609	RESISTOR,FIXED CARBON FILM
R854	0RD2001F609	RESISTOR,FIXED CARBON FILM
R855	0RD2701F609	RESISTOR,FIXED CARBON FILM
R856	0RD1002F609	RESISTOR,FIXED CARBON FILM
R857	0RD4701F609	RESISTOR,FIXED CARBON FILM
R858	0RD4701F609	RESISTOR,FIXED CARBON FILM
R859	0RD4701F609	RESISTOR,FIXED CARBON FILM
R860	0RS5600J607	RESISTOR,FIX METAL FILM OXIDE
R861	0RD2201F609	RESISTOR,FIXED CARBON FILM
R862	0RS0221H609	RESISTOR,FIX METAL FILM OXIDE
R863	0RS0102K607	RESISTOR,FIX METAL FILM OXIDE
R864	0RD4701F609	RESISTOR,FIXED CARBON FILM
R865	0RD4701F609	RESISTOR,FIXED CARBON FILM
R866	0RD1003F609	RESISTOR,FIXED CARBON FILM
R867	0RD5101H609	RESISTOR,FIXED CARBON FILM
R868	0RD5101H609	RESISTOR,FIXED CARBON FILM
R870	0RD1002F609	RESISTOR,FIXED CARBON FILM
R871	0RD4702F609	RESISTOR,FIXED CARBON FILM
R872	0RD2002H609	RESISTOR,FIXED CARBON FILM
R873	0RD1001H609	RESISTOR,FIXED CARBON FILM
R874	0RS0681K607	RESISTOR,FIX METAL FILM OXIDE
R875	0RD4701F609	RESISTOR,FIXED CARBON FILM
R876	0RD4700F609	RESISTOR,FIXED CARBON FILM
R877	0RS0331H609	RESISTOR,FIX METAL FILM OXIDE
R899	0RS0470K607	RESISTOR,FIX METAL FILM OXIDE
R1902	0RD3301F609	RESISTOR,FIXED CARBON FILM
R1904	0RD3301F609	RESISTOR,FIXED CARBON FILM
R1906	0RD3301F609	RESISTOR,FIXED CARBON FILM
R1908	0RD2201F609	RESISTOR,FIXED CARBON FILM
R1909	0RD1003H609	RESISTOR,FIXED CARBON FILM
R1911	0RD2201H609	RESISTOR,FIXED CARBON FILM
R1912	0RD2201F609	RESISTOR,FIXED CARBON FILM
R1913	0RD1003H609	RESISTOR,FIXED CARBON FILM
R1915	0RD2201H609	RESISTOR,FIXED CARBON FILM
R1916	0RD2201F609	RESISTOR,FIXED CARBON FILM

R1917	0RD1003H609	RESISTOR,FIXED CARBON FILM
R1919	0RD2201H609	RESISTOR,FIXED CARBON FILM
R1922	0RS0472H609	RESISTOR,FIX METAL FILM OXIDE
R1924	0RD2204H609	RESISTOR,FIXED CARBON FILM
RC01	106-047G	PRE-AMP
RL801	141-018E	RELAY
S01	0TR381000AB	TRANSISTOR
S01	0TR381000AB	TRANSISTOR
S02	0TR381000AB	TRANSISTOR
S02	0TR381000AB	TRANSISTOR
S03	0TR352010AB	TRANSISTOR
S04	0TR352010AB	TRANSISTOR
SG1901	165-004A	SPARK GAP
SW01	140-315A	SWITCH
SW02	140-315A	SWITCH
SW03	140-315A	SWITCH
SW04	140-315A	SWITCH
SW05	140-315A	SWITCH
SW06	140-315A	SWITCH
SW07	140-315A	SWITCH
SW08	140-315A	SWITCH
SW09	140-315A	SWITCH
SW10	140-347B	SWITCH
SW11	140-313B	SWITCH,TACT
SW11	140-348B	SWITCH
SW12	140-313B	SWITCH,TACT
SW13	140-313B	SWITCH,TACT
SW14	140-313B	SWITCH,TACT
SW851	140-289A	SWITCH
T401	150-B05C	COIL
T402	150-E06A	COIL
T501	166-C02C	FILTER
T502	166-C02E	FILTER
T701	6174Z-6001E	FBT (FLY BACK TRANSFORMER),DF
T781	151-C02H	TRANSFORMER
T801	151-A10G	TRANSFORMER,SMPS
TH801	163-051F	THERMISTOR
TU201	113-243C	TUNER
VA801	164-003D	VARISTOR
VR01	180-F03H	R,SEMI-FIX(H)
VR02	180-F03E	R,SEMI-FIX(H)
VR401	180-F03M	R,SEMI-FIX(H)
VR401	180-F03M	R,SEMI-FIX(H)
X01	156-A01T	CRYSTAL
X02	156-A08A	CRYSTAL
X03	156-A02S	CRYSTAL
X301	156-A01V	CRYSTAL
X501	156-A01C	CRYSTAL
X502	156-001B	CRYSTAL
Z501	166-A01J	FILTER
ZD01	0DZ560009CF	DIODE,ZENER
ZD02	0DZ560009CF	DIODE,ZENER
ZD03	0DZ560009CF	DIODE,ZENER
ZD04	0DZ560009CF	DIODE,ZENER
ZD05	0DZ750009AG	DIODE,ZENER
ZD06	0DZ560009CF	DIODE,ZENER

ZD201	0DZ330009DF	DIODE,ZENER
ZD202	0DZ560009CF	DIODE,ZENER
ZD203	0DZ560009CF	DIODE,ZENER
ZD204	0DZ560009CF	DIODE,ZENER
ZD205	0DZ560009CF	DIODE,ZENER
ZD206	0DZ560009CF	DIODE,ZENER
ZD208	0DZ560009CF	DIODE,ZENER
ZD209	0DZ560009CF	DIODE,ZENER
ZD210	0DZ560009CF	DIODE,ZENER
ZD532	0DZ510009AB	DIODE ZENER
ZD533	0DZ820009AH	DIODE,ZENER
ZD536	0DZ560009CF	DIODE,ZENER
ZD701	0DZ820009AH	DIODE,ZENER
ZD801	0DZ680009BB	DIODE,ZENER
ZD851	0DZ620009BB	DIODE,ZENER
ZD852	0DZ150009AD	DIODE,ZENER
ZD860	0DZ110009AD	DIODE,ZENER
ZD861	0DZ360009DA	DIODE ZENER
ZD1901	0DZ750009AG	DIODE,ZENER
ZD1902	0DZ750009AG	DIODE,ZENER
ZD1903	0DZ750009AG	DIODE,ZENER

Spec

KIA7806PI TO-220IS 6
KIA7806PI TO-220IS 6
KIA7812PI 3P(TO-220IS) 12V,1A
TDA2006,SOUND
KTD2058-Y KEC
KTD2499 TO-3P(H)IS TOSHIBA
MV-64A(U70) LG KF-21U70 MPLRK
C080PX-148K14 LG FOSTER 8 OHM
ROD,W/ADAPTER L=500 PAL
ROD,W/ADAPTER L=650 PAL
CU 14" 42TURN 5.7 OHM D02B (NY
CPT EARTH(14")
POWER(W/HOLDER,HOUSING,L=200)
A34KPU02XX 31L7ND(+0.5G)
TUNER
KF-14U70 LPLRR COMBI . .
CASSETTE,D-27,7227V000015
KNOB
ASSY,HEXAGON HEAD
CF-14U70 LPLRR (A/V IN-OUT)
CPT 022.5 S/LESS PCS625-11A
MV64A . LG EN/RU 231P/RTX 340M
MV-64A KF-21/20/14U70 LPLRR
MAIN(27DECK)
SMPS(27DECK)
MAIN POWER(KI-14U72S)
SUB POWER(KI-14U72S)
CONTROL(KI-14U72S)
CH VOL(KI-14U72S)
2.5MM 13P(L=450) GT250 TO GT25
3P 200MM 205/110T UL 1007 AWG
2.5MM 8P(L=400)GT250(H) TO GT2
DEF+POWER(MAIN2) (U70)MV64A 14
MAIN 1 (U70)MV64A M-IN(CIS/PH/
Y/C MV-64A M-IN(W/O SECAM)
VCD M-IN MV-64A 14"
KEY-BOARD MV-64A 14"
POWER-S/W(U70)MV64A
DCAD2*113V-14SNAB
DCAD2*113V-14SNAB
0.01UF 50V K
0.01U 50V K B 2.0X1.25 R/TP
0.01U 50V K B 2.0X1.25 R/TP
10UF STD 16V M FL TP5
47P 50V J SL TA52
270P 50V K B TA52
22UF STD 16V M FL TP5
100UF 16V M
22000P 50V K B 2.0X1.25 R/TP
100UF STD 10V M FL TP5
22000P 50V K B 2.0X1.25 R/TP
22000P 50V K B 2.0X1.25 R/TP
100UF STD 10V M FL TP5
4.7M SRE 50V M FL   TP(5)

150P 50V J SL 2.0X1.2 R/TP
10P 50V J SL 2.0X1.2 R/TP
12P 50V J SL 2.0X1.2 R/TP
15P 50V J NP0 TS
15P 50V J NP0 TS
8PF 50V D SL 2012 R/TP
8PF 50V D SL 2012 R/TP
0.01U 50V K B 2.0X1.25 R/TP
0.033MF 50V K
470UF STD 16V M FL TP5
10UF 16V M
0.01U 50V K B 2.0X1.25 R/TP
0.1U 50V Z F 2.0X1.2 R/TP
0.01U 50V K B 2.0X1.25 R/TP
0.01MF 16V M Y TA52
47000MF/5.5V K
100UF STD 10V M FL TP5
100UF 16V M
10UF 16V M
22000P 50V K B 2.0X1.25 R/TP
100UF 16V M
100UF 16V M
22000P 50V K B 2.0X1.25 R/TP
0.01U 50V K B 2.0X1.25 R/TP
0.01U 50V K B 2.0X1.25 R/TP
47000P 50V K B 2.0X1.25 R/TP
0.1U 50V Z F 2.0X1.2 R/TP
0.1U 50V Z F 2.0X1.2 R/TP
0.1U 50V Z F 2.0X1.2 R/TP
2.2000UF SRE 50V M FL BP(D) TP
47UF STD 10V M FL TP5
47M SRE 16V M FL TP(5)
22000P 50V K B 2.0X1.25 R/TP
100UF STD 10V M FL TP5
0.01MF 16V M Y TA52
0.022U 100V K POLY TP
47P 50V J SL TA52
1000P 50V K B TA52
0.1U 50V Z F 2.0X1.2 R/TP
0.1000UF STD 50V M FL TP5
220UF STD 16V M FL TP5
2.2000UF STD 50V M FL TP5
0.01MF 16V M Y TA52
100UF STD 16V M FL TP5
22000P 50V K B 2.0X1.25 R/TP
1UF SRE 50V M
22UF 16V M
1000P 50V K B 2.0X1.25 R/TP
4700P 50V K B 2.0X1.25 R/TP
0.0047U 100V K POLY TP
1000P 50V K B 2.0X1.25 R/TP
0.01U 50V K B 2.0X1.25 R/TP
100UF 16V M
0.01U 50V K B 2.0X1.25 R/TP
22000P 50V K B 2.0X1.25 R/TP
91P 50V K B TA52

91P 50V K B TA52
1UF 50V M
0.01U 50V K B 2.0X1.25 R/TP
220P 50V K B TA52
100P 50V J SL 2.0X1.25 R/TP
100P 50V J SL 2.0X1.25 R/TP
100P 50V J SL 2.0X1.25 R/TP
100P 50V J SL 2.0X1.25 R/TP
0.01U 50V K B 2.0X1.25 R/TP
33UF 16V M
33UF 16V M
22000P 25V Z FTA52
47UF STD 16V M FL TP5
22000P 50V K B 2.0X1.25 R/TP
100P 50V K B TA52
100P 50V K B TA52
47UF STD 50V M FL TP5
22000P 25V Z FTA52
22000P 50V K B 2.0X1.25 R/TP
1000M SMS16V M FM(5) TP(5)
0.01U 50V K B 2.0X1.25 R/TP
47UF STD 10V M FL TP5
22UF STD 16V M FL TP5
100P 50V K B TA52
22UF STD 16V M FL TP5
100UF STD 16V M FL TP5
22000P 50V K B 2.0X1.25 R/TP
22UF STD 16V M FL TP5
22UF STD 16V M FL TP5
22UF STD 16V M FL TP5
22UF STD 16V M FL TP5
100UF STD 16V M FL TP5
22UF STD 16V M FL TP5
10UF 16V M
22000P 50V K B 2.0X1.25 R/TP
100UF STD 16V M FL TP5
4.7000UF STD 50V M FL TP5
1000P 50V K B 2.0X1.25 R/TP
22UF STD 16V M FL TP5
22UF STD 16V M FL TP5
22UF STD 16V M FL TP5
470UF STD 16V M FL TP5
1000P 50V K B 2.0X1.25 R/TP
100UF STD 10V M FL TP5
1UF 50V M
100UF 16V M
1UF 50V M
1UF 50V M
1UF STD 50V M FL TP5
10UF STD 16V M FL TP5
100UF STD 10V M FL TP5
1UF 50V M
1UF SRE 50V M
10UF 16V M
100UF 16V M
10UF 16V M

1UF STD 50V M FL TP5
1UF 50V M
100UF 16V M
100UF 16V M
10UF 16V M
1000P 50V K B 2.0X1.25 R/TP
10UF 16V M
220P 50V K B TA52
0.0033U 100V K POLY TP
0.0018U 100V K POLY TP
47UF STD 16V M FL TP5
4.7000UF STD 50V M FL TP5
0.1UF 50V M
4700P 50V K B 2.0X1.25 R/TP
0.1000UF STD 50V M FL TP5
4.7000UF STD 50V M FL TP5
0.1UF 50V M
0.01UF 50V K
22UF STD 16V M FL TP5
0.01U 100V K POLY TP
22000P 50V K B 2.0X1.25 R/TP
100UF STD 16V M FL TP5
22000P 50V K B 2.0X1.25 R/TP
0.01U 50V K B 2.0X1.25 R/TP
100UF STD 16V M FL TP5
0.01UF 50V K
0.01UF 50V K
10UF STD 16V M FL TP5
0.068MF 50V K
0.01MF 16V M Y TA52
10UF STD 16V M FL TP5
TAP105K025BRS(AMMO)25V 1UF K
0.1000UF 100V J PP NI FM7.5
8P 50V D N470 TS
10UF STD 16V M FL TP5
10UF STD 16V M FL TP5
2.2000UF STD 50V M FL TP5
0.2200UF STD 50V M FL TP5
2.2UF 50V M
0.047U 100V K POLY TP
100UF STD 10V M FL TP5
0.047U 100V K POLY TP
1000P 50V K B TA52
2.2000UF STD 50V M FL TP5
0.047U 100V K POLY TP
0.1M 50V Z F TA52
0.1M 50V Z F TA52
0.1M 50V Z F TA52
1000P 50V K B TA52
0.1000UF S 50V J M/PE NI TP
50V 0.1UF J
0.1000UF S 50V J M/PE NI TP
50V 0.1UF J
220P 50V J SL TP
220P 50V J SL TP
220UF STD 10V M FL TP5

2.2000UF STD 50V M FL TP5
1UF STD 50V M FL TP5
47UF STD 10V M FL TP5
0.1000UF S 50V J M/PE NI TP
50V 0.1UF J
0.1000UF S 50V J M/PE NI TP
50V 0.1UF J
47UF STD 10V M FL TP5
0.2200UF S 50V J M/PE NI TP
50V 0.22UF J
47UF STD 10V M FL TP5
100UF STD 16V M FL TP5
4.7000UF STD 50V M FL TP5
22UF STD 50V M FL TP5
0.039U 100V K POLY TP
10UF STD 25V M FL TP5
0.1U 100V K POLY TP
220UF STD 35V M FL TP5
220UF STD 16V M FL TP5
100P 50V K B TA52
100UF STD 16V M FL TP5
100UF STD 16V M FL TP5
200V 0.047UF K
22M SM 250V M TP5
470P 500V K B TS
330UF STD 50V M FL TP5
470P 500V K B TS
4.7000UF STD 50V M FL TP5
22UF STD 100V M FL TP5
470P 500V K B TS
100P 50V K B TA52
0.1U 100V K POLY TP
330UF STD 50V M FL TP5
22UF STD 100V M FL TP5
0.01U 100V K POLY TP
0.047U 100V K POLY TP
3300P 500V K B TS
3300P 500V K B TS
0.01U 100V K POLY TP
1600V 0.0086uF H
1UF STD 160V M FL TP
330P 500V K B TS
330P 50V K B TA52
2.2000UF STD 160V M FL TP5
820P 500V K B TS
200V 0.62UF J
A.C 275V 0.22UF K (S
A.C 275V 0.22UF K (S
1000P 1KV K B TP5
1000P 1KV K B TP5
1000P 1KV K B TP5
220 UF 0 500V M VNSN BULK
1000P 500V K B TS
10UF STD 100V M FL TP5
220UF STD 16V M FL TP5
ACT 4KV E 222M TP10

ACT 4KV E 222M TP10
100UF STD 35V M FL TP5
4KV E 332M FL10
R 471K 1KV
470P 500V K B TS
R 471K 1KV
470P 500V K B TS
470P 500V K B TS
100UF STD 100V M FL TP5
1000UF STD 16V M FL TP5
1000UF STD 25V M FL TP5
1000UF STD 35V M FL TP5
220UF STD 160V M FL TP7.5
0.4700UF S 50V J M/PE NI TP
MPE 50V 0.47UF J(TR)
1000UF STD 16V M FL TP5
10UF STD 16V M FL TP5
100M SM 160V M FM7.5
220UF STD 16V M FL TP5
220UF STD 16V M FL TP5
330UF STD 25V M FL TP5
22UF STD 25V M FL TP5
0.01U 100V K POLY TP
0.3300UF S 50V J M/PE NI TP
MPE 50V 0.33UF J(TR)
0.01U 100V K POLY TP
100UF STD 25V M FL TP5
1000UF STD 16V M FL TP5
2200UF STD 16V M FL TP5
0.47U SM 50V M FM5 BP.D TP(5)
400V 0.08UF J
400V 0.08UF J
400V 0.08UF J
10M SM 250V M TP5
2KV B 222K TP7.5
12P 50V J SL TA52
12P 50V J SL TA52
12P 50V J SL TA52
560P 500V K B TS
560P 500V K B TS
560P 500V K B TS
4.7000UF STD 250V M FL TP5
(DS4148) TA
(DS4148) TA
IN4003A RECT K-ROHM TP
(DS4148) TA
(DS4148) TA
(DS4148) TA
(DS4148) TA
(DS4148) TA
(DS4148) TA
(DS4148) TA
(DS4148) TA
(DS4148) TA
(DS4148) TA
(DS4148) TA

(DS4148) TA
(DS4148) TA
(DS4148) TA
(DS4148) TA
(DS4148) TA
(DS4148) TA
(DS4148) TA
(DS4148) TA
(DS4148) TA
TVR06J 0.6A/600V 250NS TP G.I
RGP15J TA
TVR06J 0.6A/600V 250NS TP G.I
(DS4148) TA
IN4003A RECT K-ROHM TP
RGP15J TA
BRIDGE D2SBA60(STK)
GP15J TP (1.5A/600V) GI
TVR06J 0.6A/600V 250NS TP G.I
TVR06J 0.6A/600V 250NS TP G.I
TVR06J 0.6A/600V 250NS TP G.I
EH-1ZV
RU4AM,LF-L1 SANKEN SANKEN
RU-1A V
D4L20U SHINDENGEN
D4L20U SHINDENGEN
RGP15J TA
TVR06J 0.6A/600V 250NS TP G.I
(DS4148) TA
1S2471DETECT,SW(26MM)TP ROHM
TVR06J 0.6A/600V 250NS TP G.I
(DS4148) TA
IN4003A RECT K-ROHM TP
IN4003A RECT K-ROHM TP
B.P FILTER SFSH5.5MCB-TF21
B.P FILTER SFSH6.5MCB-TF21
4A/250V HBC TIME DELAY 5X20
MICRO 125V 4.0A
MICRO 125V 4.0A
FERRITE 1UH TAPING
FERRITE BFD3565R2F(TAPING)
FERRITE BFD3565R2F(TAPING)
FERRITE BFD3565R2F(TAPING)
5.6 1/2W 5 TA52
0.47 1W 5% TA62
1.0 1/2W 5 TA52
1.0 1/2W 5 TA52
1 1W 5% TA62
2W 2.2 J
KA7533Z RESET T0-92 TP 3.3V
KIA358P(OP AMP)
ST24C16 8D EEPROM
M35041-074FP 20QFPOSD
LB1645N 10SIP BK MOTOR DRIVE I
KA7533Z RESET T0-92 TP 3.3V
LG8778-01E(GMS3977S-A104F) 100
LA7222 (1280 AUDIO)

LA7222 (1280 AUDIO)
LA7437 (Y/C 1CHIP,NOT ADJ)
LC89970 (1H CCD) OC3600
LA7411 22SD 2HD AMP
LA7357 10DIP BK SECAM DETECT
BA7797 N/AUDIO
TDA8374A 56SD PAL
KIA7808PI 3P(TO-220IS) 1A,8V
TDA4665/V5 16DIP BK 1H DELAY L
TDA8395P/N2 16D SECAM DETECT.
AN5860 14D ANALOG RG
TDA8351/N5 9P,SIP BK V/OUT(W/O
STR/S6707(LF.953) 9P (R5,R6)
PC123 FY2PHOTO COUPLER
PC123 FY2PHOTO COUPLER
SE115N(LF12) 3P 115V
TDA6106Q VIDEO OUT
TDA6106Q VIDEO OUT
TDA6106Q VIDEO OUT
220 1/6W 5   TA52
220 1/6W 5   TA52
220 1/6W 5   TA52
220 1/6W 5   TA52
220 1/6W 5   TA52
220 1/6W 5   TA52
220 1/6W 5   TA52
AV W/O EARPHONE(MV-64A)
LED ASSY(FOR TVCR D-27)
PHONE 4P(AUDIO MONO) PJ
100UH K 4*10.5 TP
100UH K 4*10.5 TP
100UH K 4*10.5 TP
100UH K 4*10.5 TP
100UH K 4*10.5 TP
100UH K 4*10.5 TP
100UH K 4*10.5 TP
100UH K 4*10.5 TP
6.8UH K 2.3*3.4 TP
100UH K 4*10.5 TP
100UH K 4*10.5 TP
100UH K 4*10.5 TP
100UH K 4*10.5 TP
15UH K 2.3*3.4 TP
47UH K 2.3*3.4 TP
100UH K 4*10.5 TP
15UH K 2.3*3.4 TP
100UH K 2.3*3.4 TP
100UH K 2.3*3.4 TP
10UH K 2.3*3.4 TP
22UH K 2.3*3.4 TP
22UH K 2.3*3.4 TP
27UH K 2.3*3.4 TP
22UH K 2.3*3.4 TP
120UH K 2.3*3.4 TP
22UH K 2.3*3.4 TP
5.6UH K 2.3*3.4 TP

8.2UH K 2.3*3.4 TP
68UH K 2.3*3.4 TP
8.2UH K 2.3*3.4 TP
15UH K 2.3*3.4 TP
100UH K 2.3*3.4 TP
15UH K 2.3*3.4 TP
15UH K 2.3*3.4 TP
180UH K 2.3*3.4 TP
22UH K 2.3*3.4 TP
22UH K 2.3*3.4 TP
22UH K 2.3*3.4 TP
22UH K 2.3*3.4 TP
82UH K 2.3*3.4 TP
220UH K 2.3*3.4 TP
100UH K 4*10.5 TP
100UH K 4*10.5 TP
10UH K 2.3*3.4 TP
1.0UH K 2.3*3.4 TP
12UH K 2.3*3.4 TP
10UH K 2.3*3.4 TP
10UH K 2.3*3.4 TP
VAR,07S 1C 38.0MHZ
10UH K 2.3*3.4 TP
10UH K 2.3*3.4 TP
10UH K 2.3*3.4 TP
10UH K 2.3*3.4 TP
10UH K 2.3*3.4 TP
FERRITE 1UH TAPING
22 1/2W 5 TA52
10UH K 4*10.5 TP
10UH K 4*10.5 TP
H-LINEARITY 57UH
LINE FILTER SQE2424 19-35MH
LINE FILTER SQE2424 19-35MH
CHOKE 50UH R 1217
10UH K 4*10.5 TP
LED,A'SSY(DL-G11RA)
GL380JTP IR LED D-27
GL380JTP IR LED D-27
2P 80MM 2.5 GIL-G TO GIL-J UL
1P(L=450) HSG TO HSG
2P(L=400)UL1617 HSG TO HSG
ASSY,5P (L=150)
2.5MM 12P(L=400) GT250(H) TO G
KRC103M(AT) TO-92M TP K
KRC103M(AT) TO-92M TP K
KRC103M(AT) TO-92M TP K
KSA733C-Y,SST
KSC945C-Y SAMSUNG
KSC945C-Y SAMSUNG
KSC945C-Y SAMSUNG
KSC945C-Y SAMSUNG
KSA733C-Y,SST
KSC945C-Y SAMSUNG
KSC945C-Y SAMSUNG
KSC945C-Y SAMSUNG

KSC945C-Y SAMSUNG
KSC945C-Y SAMSUNG
KSC945C-Y SAMSUNG
KSA733C-Y,SST
KSC945C-Y SAMSUNG
KSC945C-Y SAMSUNG
KSA733C-Y,SST
KSA733C-Y,SST
KRC103M(AT) TO-92M TP K
KRC103M(AT) TO-92M TP K
KSA733C-Y,SST
2SA1504S
KRC103M(AT) TO-92M TP K
KSA733C-Y,SST
KRC103M(AT) TO-92M TP K
KTC3205-TP-Y (KTC2236A)KEC
KTC3197,TP(KTC388A),KEC
CHIP 2SC3875S(ALY) KEC
CHIP 2SC3875S(ALY) KEC
CHIP 2SC3875S(ALY) KEC
CHIP KRC102S SOT-23 TP KEC
KSC945C-Y SAMSUNG
CHIP 2SC3875S(ALY) KEC
KSC945C-Y SAMSUNG
KSC945C-Y SAMSUNG
KTC3207,TP(KTC2482),KEC
2SC3852A SANKEN
KTC3228-0 TP(KTC2383),KEC
KSC945C-Y SAMSUNG
KSC945C-Y SAMSUNG
KSC945C-Y SAMSUNG
KSC945C-Y SAMSUNG
KTA1273-TP-Y (KTA966A)KEC
KSC945C-Y SAMSUNG
KTC3228-0 TP(KTC2383),KEC
KTA968A-Y KEC
KSC945C-Y SAMSUNG
KTC3227-Y,TP(KTC1627A),KEC
10K 1/10W 5 D.R/TP
560 1/6W 5 TA52
560 1/6W 5 TA52
220 1/6W 5 TA52
220 1/6W 5 TA52
33K 1/10W 5 D.R/TP
10K 1/10W 5 D.R/TP
220 1/6W 5 TA52
220 1/6W 5 TA52
33K 1/10W 5 D.R/TP
10K 1/10W 5 D.R/TP
4.7K 1/10W 5 D.R/TP
4.7K 1/10W 5 D.R/TP
330 1/6W 5 TA52
330 1/10W 5 D.R/TP
27K 1/10W 5 D.R/TP
1.0K 1/10W 5 D.R/TP
270K 1/10W 5 D.R/TP

1.0M 1/6W 5 TA52
1.0K 1/6W 5 TA52
10K 1/10W 5 D.R/TP
1.0M 1/10W 5 D.R/TP
1.0M 1/10W 5 D.R/TP
12K 1/10W 5 D.R/TP
10K 1/10W 5 D.R/TP
120K 1/10W 5 D.R/TP
1.0K 1/6W 5 TA52
4.7K 1/10W 5 D.R/TP
4.7K 1/10W 5 D.R/TP
4.7K 1/10W 5 D.R/TP
4.7K 1/10W 5 D.R/TP
4.7K 1/10W 5 D.R/TP
4.7K 1/10W 5 D.R/TP
4.7K 1/10W 5 D.R/TP
4.7K 1/10W 5 D.R/TP
220 1/6W 5 TA52
4.7K 1/10W 5 D.R/TP
220 1/6W 5 TA52
120K 1/10W 5 D.R/TP
12K 1/10W 5 D.R/TP
1.0K 1/6W 5 TA52
1.0K 1/6W 5 TA52
220 1/6W 5 TA52
220 1/6W 5 TA52
220 1/6W 5 TA52
2.2K 1/10W 5 D.R/TP
2.2K 1/10W 5 D.R/TP
2.2K 1/10W 5 D.R/TP
2.2K 1/6W 5 TA52
3.9K 1/6W 5 TA52
4.7K 1/6W 5 TA52
4.7K 1/10W 5 D.R/TP
3.9K 1/6W 5 TA52
4.7K 1/6W 5 TA52
10K 1/6W 5 TA52
4.7K 1/6W 5 TA52
4.7K 1/6W 5 TA52
4.7K 1/6W 5 TA52
4.7K 1/6W 5 TA52
100K 1/10W 5 D.R/TP
1.0K 1/6W 5 TA52
220 1/6W 5 TA52
220 1/6W 5 TA52
10K 1/6W 5 TA52
120K 1/6W 5 TA52
2.2K 1/10W 5 D.R/TP
5.6K 1/10W 5 D.R/TP
4.7K 1/10W 5 D.R/TP
330 1/10W 5 D.R/TP
5.6K 1/6W 5 TA52
15K 1/6W 1% TA52
15K 1/6W 1% TA52
4.7K 1/10W 5 D.R/TP
5.6K 1/6W 5 TA52

22K 1/10W 5 D.R/TP
470K 1/6W 5 TA52
10K 1/6W 5 TA52
10K 1/6W 5 TA52
1.6 1/2W 5 TA52
1.6 1/2W 5 TA52
100 1/10W 5 D.R/TP
220K 1/10W 5 D.R/TP
12K 1/10W 5 D.R/TP
1.0K 1/10W 5 D.R/TP
10K 1/10W 5 D.R/TP
3.3K 1/10W 5 D.R/TP
220 1/6W 5 TA52
220 1/6W 5 TA52
100 1/6W 5 TA52
100 1/6W 5 TA52
1.5K 1/10W 5 D.R/TP
180K 1/6W 5 TA52
330 1/10W 5 D.R/TP
330 1/10W 5 D.R/TP
330 1/10W 5 D.R/TP
330 1/10W 5 D.R/TP
4.7K 1/10W 5 D.R/TP
75 1/10W 5 D.R/TP
1.0K 1/6W 5 TA52
680 1/10W 5 D.R/TP
820 1/10W 5 D.R/TP
1.2K 1/10W 5 D.R/TP
1.8K 1/10W 5 D.R/TP
3.3K 1/10W 5 D.R/TP
6.8K 1/10W 5 D.R/TP
680 1/10W 5 D.R/TP
1.0K 1/6W 5 TA52
1.0K 1/6W 5 TA52
100 1/10W 5 D.R/TP
56K 1/6W 5 TA52
100 1/6W 5 TA52
100 1/10W 5 D.R/TP
100 1/6W 5 TA52
15K 1/6W 5 TA52
4.7K 1/10W 5 D.R/TP
0 1/10W 5 D.R/TP
100 1/6W 5 TA52
4.7K 1/10W 5 D.R/TP
100 1/10W 5 D.R/TP
100 1/10W 5 D.R/TP
0 1/10W 5 D.R/TP
220 1/10W 5 D.R/TP
0 1/10W 5 D.R/TP
0 1/10W 5 D.R/TP
0 1/10W 5 D.R/TP
0 1/10W 5 D.R/TP
220 1/10W 5 D.R/TP
0 1/10W 5 D.R/TP
0 1/10W 5 D.R/TP
0 1/10W 5 D.R/TP

0 1/10W 5 D.R/TP
0 1/10W 5 D.R/TP
0 1/10W 5 D.R/TP
0 1/10W 5 D.R/TP
0 1/10W 5 D.R/TP
0 1/10W 5 D.R/TP
220 1/10W 5 D.R/TP
220 1/10W 5 D.R/TP
220 1/10W 5 D.R/TP
220 1/6W 5 TA52
390 1/10W 5 D.R/TP
15K 1/6W 5 TA52
12K 1/6W 5 TA52
20K 1/6W 5 TA52
33K 1/6W 5 TA52
680 1/10W 5 D.R/TP
68 1/10W 5 D.R/TP
100 1/6W 5 TA52
10K 1/6W 5 TA52
180 1/6W 5 TA52
75 1/10W 5 D.R/TP
75 1/10W 5 D.R/TP
100 1/10W 5 D.R/TP
1.0K 1/10W 5 D.R/TP
47K 1/10W 5 D.R/TP
47K 1/10W 5 D.R/TP
1.0K 1/10W 5 D.R/TP
470 1/10W 5 D.R/TP
100 1/6W 5 TA52
390 1/6W 5 TA52
1.0K 1/6W 5 TA52
1.0K 1/6W 5 TA52
1.0K 1/6W 5 TA52
68K 1/6W 5 TA52
10 1/6W 5 TA52
18K 1/10W 5 D.R/TP
22K 1/10W 5 D.R/TP
18K 1/10W 5 D.R/TP
1.2K 1/10W 5 D.R/TP
0 1/10W 5 D.R/TP
1.0K 1/6W 5 TA52
1.0K 1/10W 5 D.R/TP
1.0K 1/10W 5 D.R/TP
6.8K 1/10W 5 D.R/TP
47K 1/10W 5 D.R/TP
10K 1/10W 5 D.R/TP
8.2K 1/6W 5 TA52
33K 1/10W 5 D.R/TP
1.0K 1/6W 5 TA52
3.3K 1/10W 5 D.R/TP
0 1/10W 5 D.R/TP
220 1/10W 5 D.R/TP
330K 1/10W 5 D.R/TP
12K 1/10W 5 D.R/TP
12K 1/10W 5 D.R/TP
4.7K 1/10W 5 D.R/TP

10K 1/10W 5 D.R/TP
27K 1/6W 5 TA52
10 1/6W 5 TA52
47 1/6W 5 TA52
4.7K 1/6W 5 TA52
6.2K 1/10W 5 D.R/TP
1.0M 1/10W 5 D.R/TP
47K 1/6W 5 TA52
22 1/10W 5 D.R/TP
22 1/10W 5 D.R/TP
820 1/6W 5 TA52
1.2K 1/6W 5 TA52
1.8K 1/6W 5 TA52
3.3K 1/6W 5 TA52
39K 1/6W 1% TA52
180 1/6W 5 TA52
1.0K 1/6W 5 TA52
100 1/6W 5 TA52
100 1/6W 5 TA52
220 1/6W 5 TA52
220 1/6W 5 TA52
220 1/6W 5 TA52
47 1/6W 5 TA52
150 1/2W 5 TA52
6.2K 1/6W 5 TA52
100 1/6W 5 TA52
100 1/6W 5 TA52
100 1/6W 5 TA52
100K 1/6W 5 TA52
100K 1/6W 5 TA52
100K 1/6W 5 TA52
2.2 1/2W 5 TA52
75K 1/6W 5 TA52
8.2K 1/6W 5 TA52
39K 1/6W 5 TA52
51K 1/6W 5 TA52
1.0K 1/6W 5 TA52
1.2K 1/6W 5 TA52
4.7K 1/6W 5 TA52
4.7K 1/6W 5 TA52
220K 1/6W 5 TA52
47K 1/2W 5 TA52
100K 1/2W 5 TA52
220K 1/2W 5 TA52
15K 1/2W 5 TA52
2.7K 1/2W 5 TA52
2.70K 1/6W 1% TA52
0.68 1W 5% TA62
20 1/6W 5 TA52
3.9K 1/6W 5 TA52
27K 1W 5% TA62
220 1W 5% TA62
2.70K 1/6W 1% TA52
820K 1/6W 5 TA52
33 1/2W 5 TA52
3.3K 1/2W 5 TA52

4.70K 2W 5% TA62
470 1/6W 5 TA52
12K 1W 5% TA62
1.8K 1/2W 5 TA52
4.70K 2W 5% TA62
91 1/6W 5 TA52
10W 1.0OHM J
22K 2W 5% TA62
22K 2W 5% TA62
20K 1/2W 5 TA52
1.6K 1/6W 5 TA52
1.0K 1/6W 5 TA52
22 2W 5% TA62
2W 0.27 J
1.0K 1/6W 5 TA52
C12GK825V(RC 1/2W 8.2M K TA)
1.5 1/2W 5 TA52
6.8K 1/2W 5 TA52
100 1/2W 5 TA52
6.8K 1/6W 5 TA52
3.3K 1/6W 5 TA52
6.2K 1/6W 5 TA52
2.0K 1/6W 5 TA52
2.7K 1/6W 5 TA52
10K 1/6W 5 TA52
4.7K 1/6W 5 TA52
4.7K 1/6W 5 TA52
4.7K 1/6W 5 TA52
560 1W 5% TA62
2.2K 1/6W 5 TA52
2.2 1/2W 5 TA52
10 2W 5% TA62
4.7K 1/6W 5 TA52
4.7K 1/6W 5 TA52
100K 1/6W 5 TA52
5.1K 1/2W 5 TA52
5.1K 1/2W 5 TA52
10K 1/6W 5 TA52
47K 1/6W 5 TA52
20K 1/2W 5 TA52
1.0K 1/2W 5 M15
6.80 2W 5% TA62
4.7K 1/6W 5 TA52
470 1/6W 5 TA52
3.3 1/2W 5 TA52
0.47 2W 5% TA62
3.3K 1/6W 5 TA52
3.3K 1/6W 5 TA52
3.3K 1/6W 5 TA52
2.2K 1/6W 5 TA52
100K 1/2W 5 TA52
2.2K 1/2W 5 TA52
2.2K 1/6W 5 TA52
100K 1/2W 5 TA52
2.2K 1/2W 5 TA52
2.2K 1/6W 5 TA52

100K 1/2W 5 TA52
2.2K 1/2W 5 TA52
47   1/2W 5 TA52
2.2M 1/2W 5 TA52
SBX2020-82 SONY 38.0KHZ MESH
DG12D1-0(M)-2 12V44MA
PT-381FBC PHOTO/TR
PT-381FBC PHOTO/TR
PT-381FBC PHOTO/TR
PT-381FBC PHOTO/TR
RPI-352Q01 STICK PHO
RPI-352Q01 STICK PHO
AG20PT 152F-L3N/S-23
TACT 4LEAD 160g H4.75mmVERT TA
TACT 4LEAD 160g H4.75mmVERT TA
TACT 4LEAD 160g H4.75mmVERT TA
TACT 4LEAD 160g H4.75mmVERT TA
TACT 4LEAD 160g H4.75mmVERT TA
TACT 4LEAD 160g H4.75mmVERT TA
TACT 4LEAD 160g H4.75mmVERT TA
TACT 4LEAD 160g H4.75mmVERT TA
TACT 4LEAD 160g H4.75mmVERT TA
MPU10105MMBO JAPAN-MIC NON 5V
TACT 2LEAD 160G H:5M
MPU10400MLBO JAPAN-MIC NON 5V
TACT 2LEAD 160G H:5M
TACT 2LEAD 160G H:5M
TACT 2LEAD 160G H:5M
SDDF3PASP013(GS-ALPS) TV8
L/C FILTER(07S) LPF
VAR,07S 6F 252KHZ
TRAP TPS5.5MB-TF21
TRAP TPS6.5MB-TF21
FTMPN11-T6001E
H-DRIVE,EI-19,BULK
EER4445(HORIZONTAL) 710UH MV-6
J503P84D140M290Q JA HWA Q 220V
TUGG9-C07P(HYPER,DIN)
SVC 561D-14A
EVN-DJAA03 B103
EVN-DJAA03 B202
EVN-DJAY03 B204
EVN-DJAY03 B204
10.000000 12PF 30OHM BULK
32.7680KHZ +-10PPM
17.734476 12PF 25 OHM BULK
4.433619 SER.PF 80 OHM BULK
3.579545 90 OHM BULK
4.433619MHZ(00384)PHILIPS
OFWK2959M
MTZJ5.6B TP ROHM-K DO34 0.5W 5
MTZJ5.6B TP ROHM-K DO34 0.5W 5
MTZJ5.6B TP ROHM-K DO34 0.5W 5
MTZJ5.6B TP ROHM-K DO34 0.5W 5
MTZJ7.5B TP ROHM-K DO34 0.5W 7
MTZJ5.6B TP ROHM-K DO34 0.5W 5

MTZJ33B TP ROHM-K DO34 0.5W 33
MTZJ5.6B TP ROHM-K DO34 0.5W 5
MTZJ5.6B TP ROHM-K DO34 0.5W 5
MTZJ5.6B TP ROHM-K DO34 0.5W 5
MTZJ5.6B TP ROHM-K DO34 0.5W 5
MTZJ5.6B TP ROHM-K DO34 0.5W 5
MTZJ5.6B TP ROHM-K DO34 0.5W 5
MTZJ5.6B TP ROHM-K DO34 0.5W 5
MTZJ5.6B TP ROHM-K DO34 0.5W 5
MTZ5.1B(TA)
MTZJ8.2B TP ROHM-K DO34 500MW
MTZJ5.6B TP ROHM-K DO34 0.5W 5
MTZJ8.2B TP ROHM-K DO34 500MW
MTZJ6.8B TP ROHM-K DO34 0.5W 6
MTZJ6.2B TP ROHM-K DO34 0.5W 6
MTZJ15B TP ROHM-K DO34 500MW 1
MTZJ11B TP ROHM-K DO34 500MW 1
ZW3.6BL TA
MTZJ7.5B TP ROHM-K DO34 0.5W 7
MTZJ7.5B TP ROHM-K DO34 0.5W 7
MTZJ7.5B TP ROHM-K DO34 0.5W 7